

QuW

Quietly Washed




Spec-grade performance LED downlights. Optimal for hospitality, high-end residential and corporate projects.

Pi downlights offer, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Tool-less Push-and-Release reflector
- 2 options of mounting brackets
- 6mm and 9mm LES COB LED engines
- Dim-to-Warm capability with the "W" output
- Specific driver brands available on request
- Min. Fixture Efficiency 100lm/W (for Static White)
- 5 Years limited warranty

Code example:

QuW-NIC-1-T-W-WD-9-W-WF-W-1-S-0

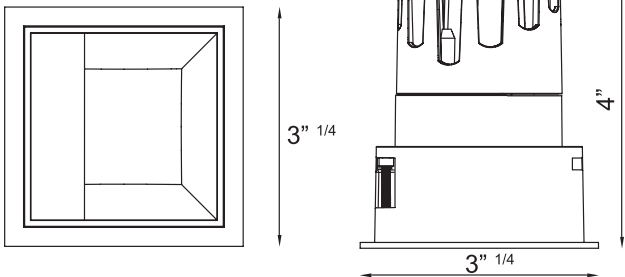

Series	Housing	H*	Voltage	Trim
QuW	INT Remodel	4 in.	1 120V	T Trim
	NIC Non-IC (New)	4 in.	2 240V	0 Trimless
	ICN IC (New)	5 in.	3 277V	M Millwork
	ICA IC-Airtight (New)	7 in.	U Unv.	
	CHP Chicago Plenum	7 in.		

* Overall height of housing

Output*	Color Temp	CRI	Beam	Reflector	Finish	Dimming	Accessories	Emergency
L 500lm (7W)	27 2700°K	8 +80	W Wallwash	WF Flat White	W Flat White	0 No Dimming	W Wet Location	0 No
S 850lm (11W)	30 3000°K	9 +90		BF Flat Black	B Flat Black	1 0-10V to 1%		1 1hr.
H 1200lm (15W)	35 3500°K			BN Black Nickel	S Silver	2 0-10V to Fade-off		2 2hrs.
W ¹ 950lm (15W)	40 4000°K			SC Specular Chrome		E ELV Dimming		3 3hrs.
	WD ² 3000°K-1900°K			DC Diffuse Chrome		D DALI to 1%		
				BG Bright Gold				
				DG Diffuse Gold				

Notes:

* Denotes Delivered Output at 4,000°K CRI+80

¹ Denotes output specific to Dim-to-Warm and Tunable White features.

² Dim-to-Warm and Tunable White only available in CRI +90.

Check with Factory for Lead-times.


Bold Lighting reserves the right to make technical changes without notice.




Bold Lighting
 Atlanta, Georgia, USA
www.boldlighting.us
 e: info@boldlighting.us t: +1-833-BOLD-1-US +1-833-265-3187

Photometric data: Type C Polar Curves

Wallwash Distribution

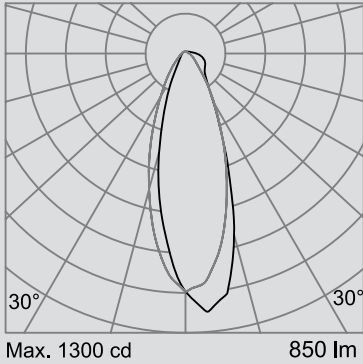

Wallwasher optimal spacing

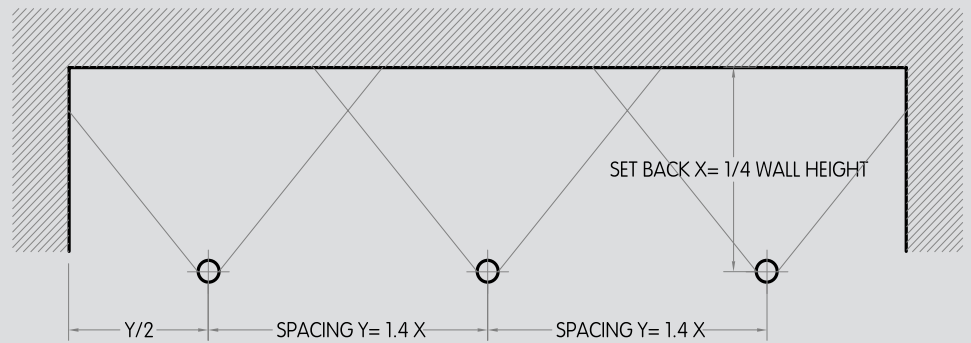


Plan View

Delivered Lumen Output

Output	Consumption	CRI 80			CRI 90		
		2700K	3000K	4000K	2700 K	3000 K	4000 K
S	9W	896lm	944lm	984lm	796lm	944lm	832lm
H	13 W	1200lm	1268lm	1320lm	1000lm	1064lm	1120lm

NON-IC HOUSING

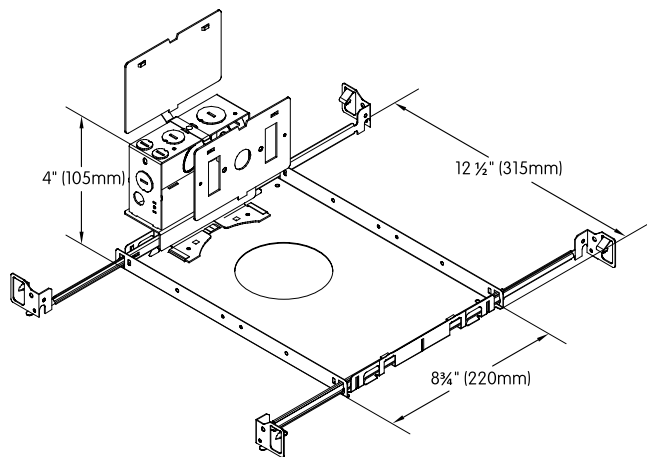

LABELS:

ETL tested to UL standards 1598, Dry/Wet listings
IC/Airtight, compliant. Chicago Plenum Available


CE Certified

CCC Certified to GB7000


TITLE 24 COMPLIANT
JA8 Certified to Title 24 standards

WARRANTY: 5 year limited on LED and driver. See website for details

IC HOUSING

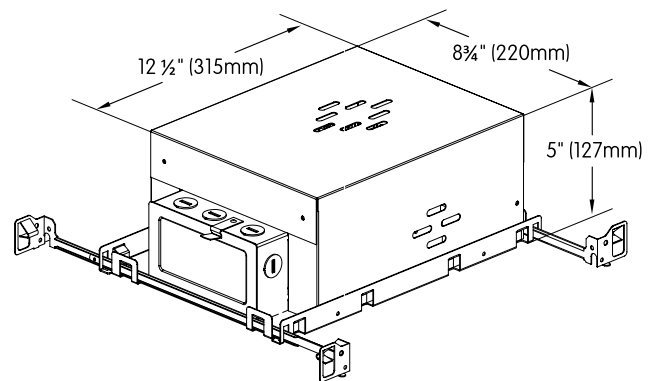

AIRTIGHT IC HOUSING

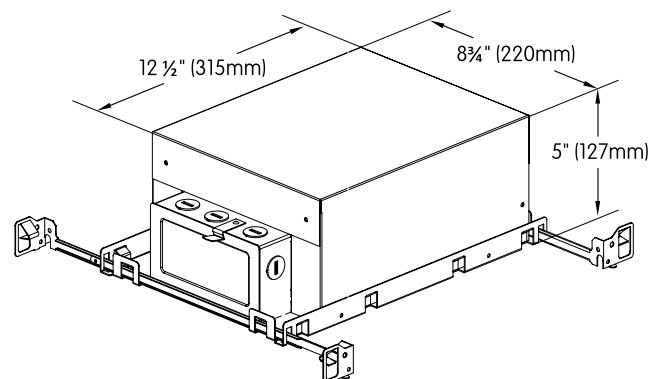

Bold Lighting

Atlanta, Georgia, USA
www.boldlighting.us

e: info@boldlighting.us t: +1-833-BOLD-1-US +1-833-265-3187