

ECLIPSE 3

Visibly Invisible



RECESSED



SURFACE MOUNTED



PENDANT


Eclipse is an adjustable, indirect illumination downlight; The hidden source is located in the static blade, shining up on the reflector, while the reflector travels in an orbital movement around the center of the fixture to allow a maximum vertical and horizontal beam tilt and adjustability. Its precise optics allow an outstanding beam control and a quiet transition between horizontal and vertical illumination. It is the ideal solution for applications requiring a hidden light source along with precise optics and extreme adjustability up to 45° in tilt and 360° of beam rotation.

- Up to 500lm delivered output
- Completely glare free 100% reflected light
- Available in recessed with trim & trimless, surface and pendant
- Adjustable beam tilt up to 45° in any direction (360°)
- Adjustable beam spread from 15° to 35° and 35° to 50°
- Available in 4 standard finishes: Black, white, silver and bronze

Delivered Lumen Output (Per Module)

Output	Watts	CRI +80			CRI +90		
		2700K	3000K	4000K	2700K	3000K	4000K
S	4W	286lm	307lm	325lm	278lm	294lm	316lm
H	6W	565lm	579lm	592lm	492lm	508lm	527lm

Standard Finishes

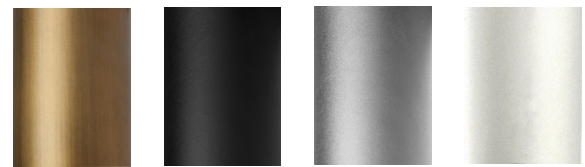

BZ

BL

SL

WH

Code example:

E3-S-R0-927-N-BL

E3

Output	Mounting	CRI	CCT.	Beam	Dimming	Finish
S 3 x 300lm 3 x (4W)	RT Recessed with Trim	8 +80	27 2700K	N 15° to 35°	ND Non-Dim	WH Flat White
H 3 x 500lm 3 x (6W)	RO Recessed Trimless	9 +90	30 3000K	F 35° to 50°	T0 0-10V to 5%	BL Flat Black
	SM Surface Mounted		35 3500K		O1 0-10V to 0.1%	SL Silver
	PD Pendant		40 4000K		E ELV Dimming	BZ Bronze



Bold Lighting

Atlanta, Georgia, USA
www.boldlighting.us

e: info@boldlighting.us t: +1-833-BOLD-1-US +1-833-265-3187


ECLIPSE 3

Visibly Invisible


bold
lighting

Photometric data: Type C Polar Curves


Narrow Beam

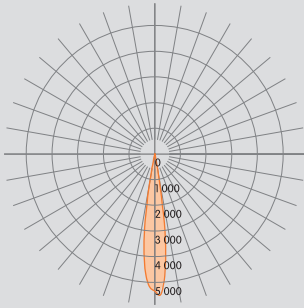


45° Beam Angle Tilt

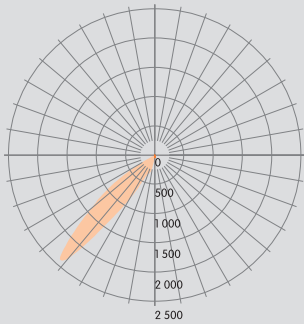

Wide Beam

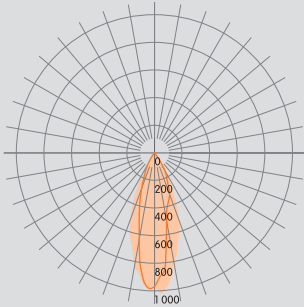


45° Beam Angle Tilt

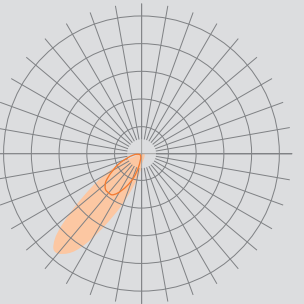


MULTIPLE THREE CELLS

Recessed with trim

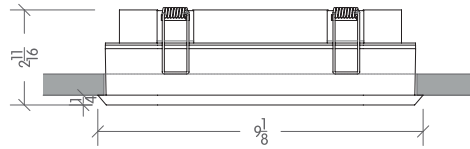


01 FRONT VIEW
SCALE: N/A

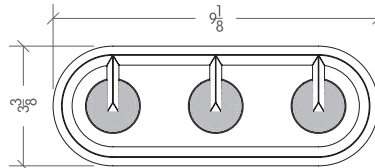


02 BOTTOM VIEW
SCALE: N/A


Surface mounted

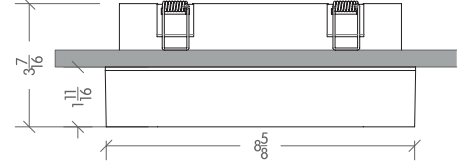


01 FRONT VIEW
SCALE: N/A

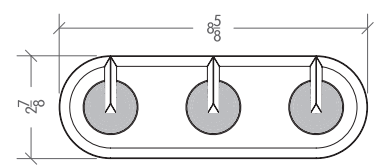

02 BOTTOM VIEW
SCALE: N/A

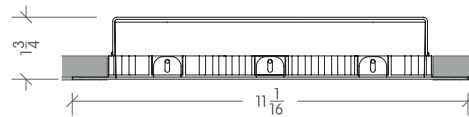


01 FRONT VIEW
SCALE: N/A

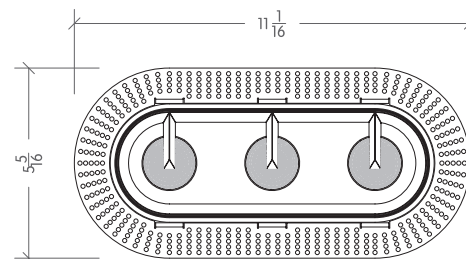


02 BOTTOM VIEW
SCALE: N/A

Recessed trimless

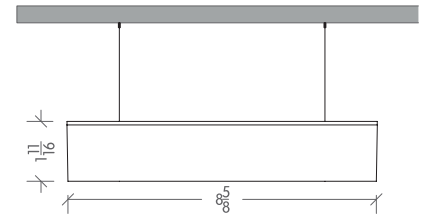


01 FRONT VIEW
SCALE: N/A

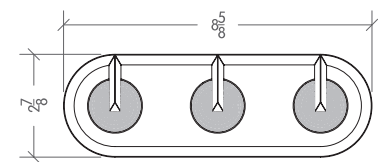

02 BOTTOM VIEW
SCALE: N/A

Pendant

LABELS:

 ETL tested to UL standards 2108, Dry Location

 CE Certified

WARRANTY: 5 year limited on LED and driver. See website for details

Bold Lighting
Atlanta, Georgia, USA
www.boldlighting.us

e: info@boldlighting.us t: +1-833-BOLD-1-US +1-833-265-3187