


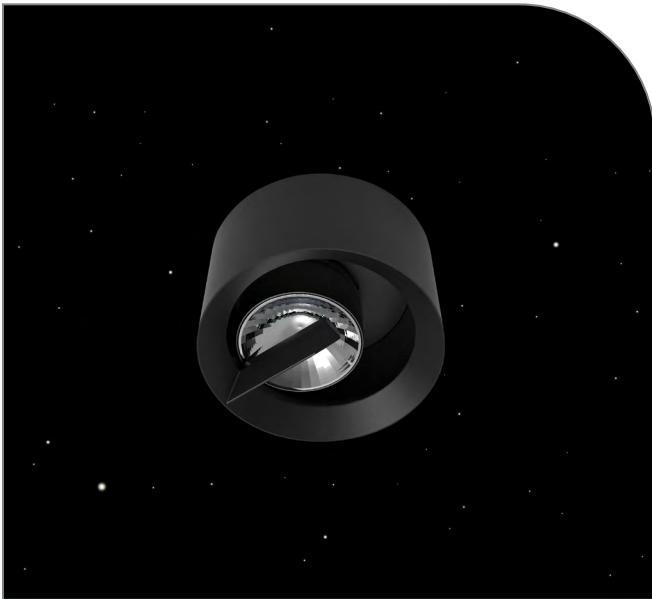


reddot winner 2021

Eclipse is an adjustable, indirect illumination downlight; The hidden source is located in the static blade, shining up on the reflector, while the reflector travels in an orbital movement around the center of the fixture to allow a maximum vertical and horizontal beam tilt and adjustability. Its precise optics allow an outstanding beam control and a quiet transition between horizontal and vertical illumination. It is the ideal solution for applications requiring a hidden light source along with precise optics and extreme adjustability up to 45° in tilt and 360° of beam rotation.

- Up to 470lm delivered output
- Completely glare free 100% reflected light
- Available in recessed with trim & trimless, semi-recessed, pendant, millwork and surface mounted
- Adjustable beam tilt up to 45° in any direction (360°)
- Adjustable beam spread from 10° to 30° (narrow reflector), from 40° to 60° (wide reflector)
- Available in 4 standard finishes: Black, white, silver and bronze

STANDARD FINISHES

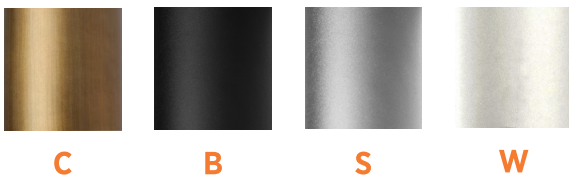

DELIVERED LUMEN OUTPUT PER CELL

Output		Watts		CRI +90		
				2700K	3000K	4000K
L	4W			240 lm	270 lm	300 lm
M	6W			380 lm	425 lm	470 lm

Code example: **E1**-RW-L11R-N927-9

Series	Mounting	Finish	Output	Voltage	Dimming	Housing	Beam	CRI	CCT.	Emergency
E1	R Recessed with Trim	W Flat White	L ¹ 270 lm (4W)	1 120V	0 Non-Dim	A ³ Airtight Housing	N 10° to 30°	9 +90	27 2700K	N No
	T Recessed Trimless	B Flat Black	M ¹ 425 lm (6W)	U ² Universal 120V to 277V	1 0-10V to 5%	I ³ IC Housing	W 40° to 60°		30 3000K	9 90 mins
	S Semi-Recessed	S Silver			2 0-10V to 0.1%	N ³ Non-IC Housing			35 3500K	
	P Pendant	C Bronze			P ELV Dimming	R ³ Remodel Housing			40 4000K	
	M Millwork	X Custom								
	E Surface Mounted									

Notes:

¹ Denotes output at 3000K, unless otherwise noted.

² Not applicable for ELV dimming.



³ Housings are only for recessed mounting.





OPTICAL FLEXIBILITY

Photometric data: Type C Polar Curves


Narrow Beam




Narrow Beam - Beam Angle Tilt





Cartesian Diagram




Medium Beam





Wide Beam - Beam Angle Tilt




Cartesian Diagram




Wide Beam



NON-IC HOUSING

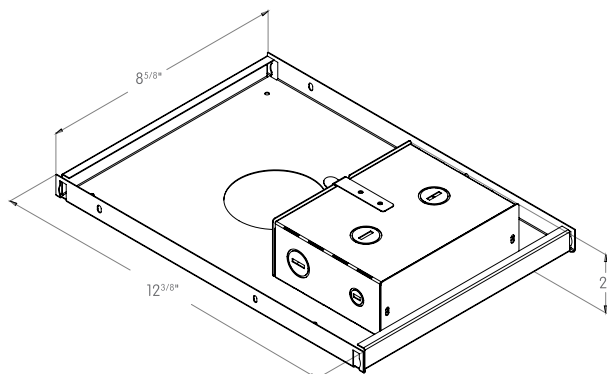

IC HOUSING & AIRTIGHT

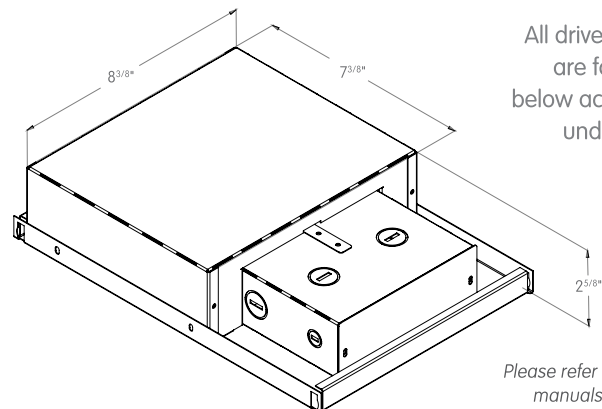




All drivers enclosures are for install from below accessible from under the ceiling.

Please refer to the installation manuals for more details.





MOUNTING FLEXIBILITY



TRIM

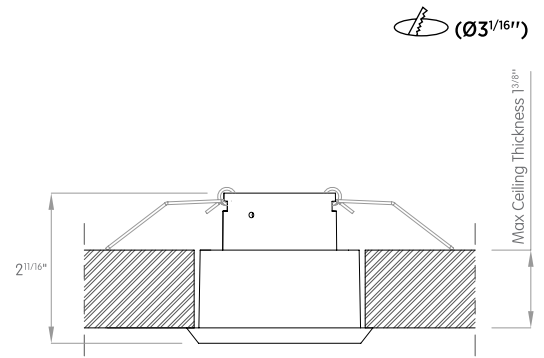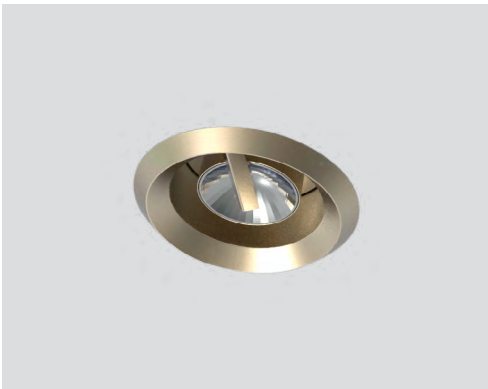

TRIMLESS

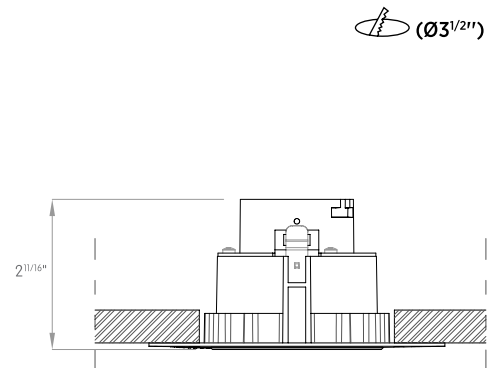



SURFACE MOUNTED

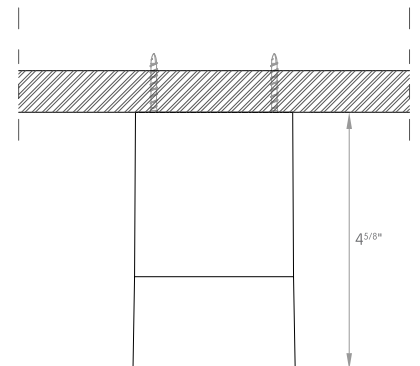



MOUNTING FLEXIBILITY

SURFACE MOUNTED SEMI-RECESSED

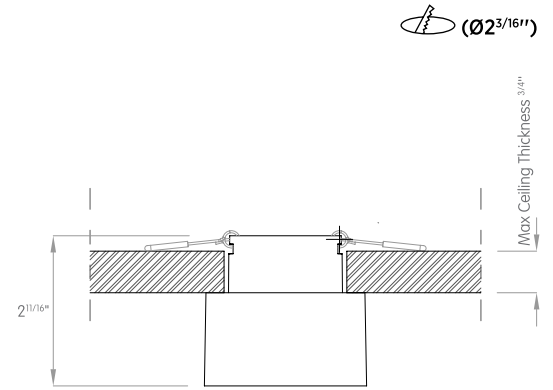

MILLWORK

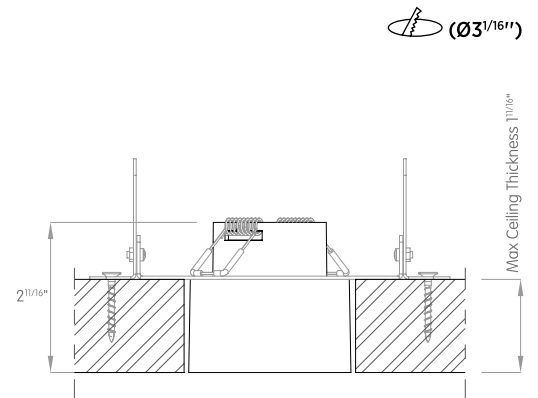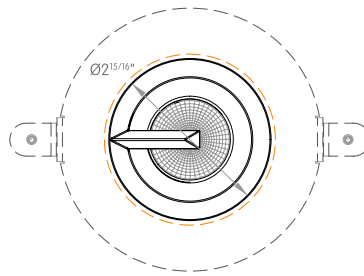

PENDANT

