


ghost

INTANGIBLE PRESENCE

by

bold

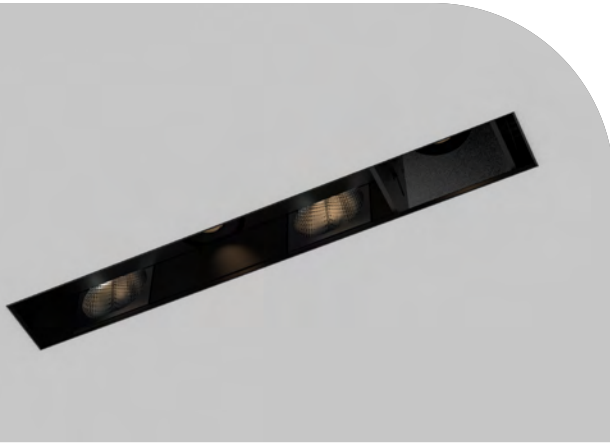

Ghost is a unique optical lighting system designed to disappear in a narrow 1" slot. The optics are deeply regressed to give the impression of a slim void and the mud flange provides a trimless integration in gypsum ceilings, also available with trim option. Ghost relies on indirect light reflectors and double focus lens technology to achieve glare-free optics. It offers an infinite number of optical iterations allowing transitions from a fixed downlight to an adjustable downlight, to a single wallwash and even to a double wallwash. All these optics are integrated into a compact slot for an outstanding quiet lighting effect.

- ☐ Discreet and regressed source of light
- ☐ UGR <10
- ☐ Multi-Optics configurations
- ☐ Fixed Downlight, Wallwash, and Adjustable Accent from a 30mm Slot
- ☐ Unobstructed complete beams even with 40° tilt

Series	Mounting	Nominal Length ¹	Body Finish	Wallwash ²	Wallwash Output	Downlight Options	Downlight Output	Beam Angle
GI	R Recessed with Trim	06 6"	W White	W0 No Washer 0 per module	L 4W	0 0 per module	L 4W	S 24°
	T Recessed Trimless	12 12"	B Black	W2 Wallwash One side	M 8W	1 1 per module	M 8W	M 36°
			G Grey	W4 Wallwash Both sides	X N/A	2 2 per module	H N/A	X N/A
			X Custom RAL			3 3 per module		
						4 4 per module		

PRODUCT CONFIGURATION : **GI-R06W-W2L-1LS-1A-827-0**

--	--	--	--	--	--	--	--

Adjustable Options	Adjustable Output	Beam Angle	Voltage	Dimming	CRI	Color Temp	Emergency
0 0 per module	L 4W	S 24°	1 120V	A No Dimming	8 +80	27 2700K	0 no
1 1 per module	M 8W	M 36°	U³ Universal 120V to 277V	B 0-10V to 1%	9 +90	30 3000K	9 90 mins
2 2 per module	X N/A	X N/A		C 0-10V to Fade-off		35 3500K	
3 3 per module				D DALI to 1%		40 4000K	
				E ELV Dimming			
				F DMX			
				G⁴ LUTRON			

PRODUCT CONFIGURATION : **GI-R06W-W2L-1LS-1A-827-0**

--	--	--	--	--	--	--	--

Notes:

¹ For exact lengths refer to dimensions table.

² Double the output for the both sides case.

³ Not applicable for ELV dimming.

⁴ Hi-lume 1% EcoSystem Soft-on, Fade-to-Black dimming.

Consult factory for lead-times.

Consult factory for systems using multiple optics and mounting configurations.




Bold Lighting


4710 Ecton Dr., Marietta, GA 30066, USA
info@boldlighting.us www.boldlighting.us

t: +1-678-903-4061


REMODEL HOUSING

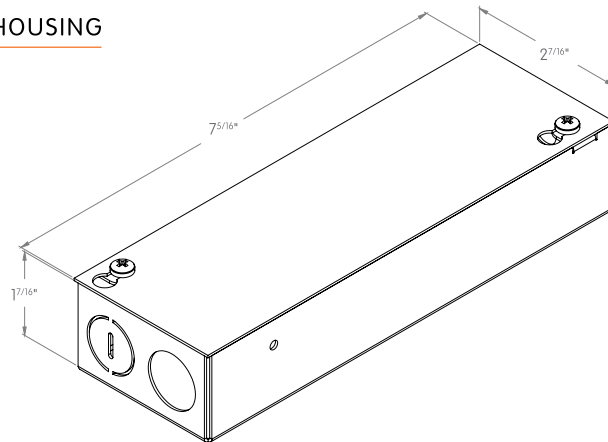

NON-IC HOUSING

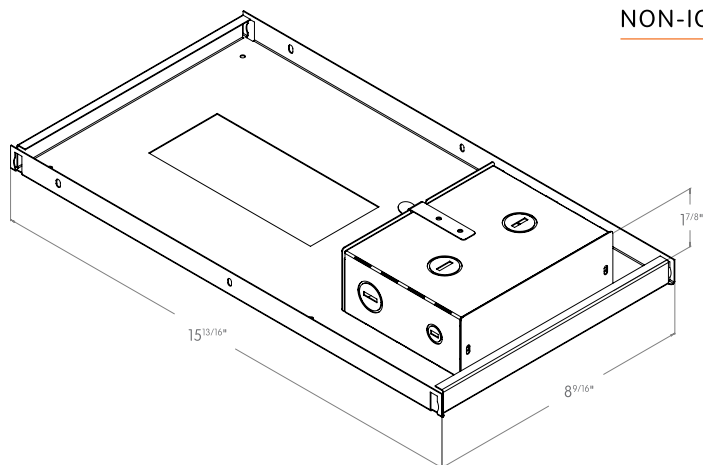

IC HOUSING & AIRTIGHT

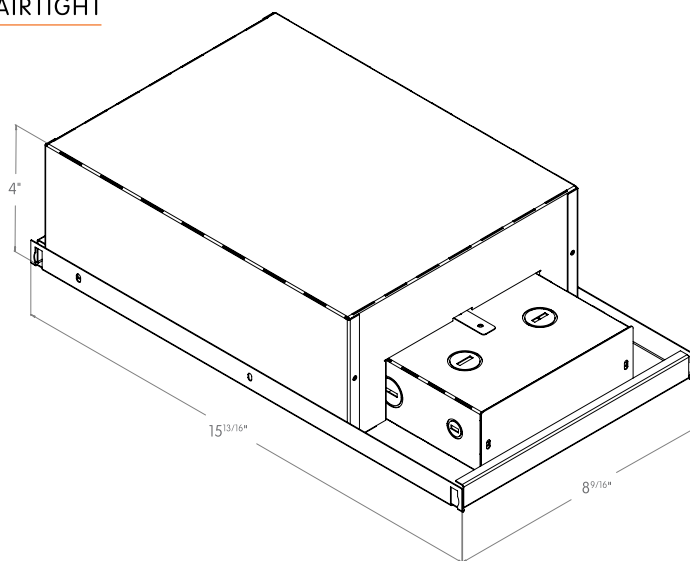


OPTICAL FLEXIBILITY

Photometric data: Fixed and Adjustable Polar Curves

GHOST MEDIUM BEAM



Medium 24°



Max. 2,055 cd


870 lm

The 24° medium beam is a versatile distribution that works in a wide range of applications and spaces. This optic is a nice balance between light punch and ambient uniformity.

GHOST FLOOD BEAM



Flood 36°



Max. 1,530 cd

870 lm


A 36° flood beam is the optimal option for achieving efficient ambient lighting with excellent uniformity and very low glare.

Photometric data: Wallwash Polar Curve

GHOST ONE SIDE WALLWASH



One side Wallwash




Max. 1,657 cd

500 lm

GHOST DOUBLE SIDE WALLWASH



Double side Wallwash




Max. 1,657 cd

500 lm


Billet wallwash provides even illumination of vertical surfaces. This optic is ideal for washing large areas where exceptional uniformity is required.

MOUNTING FLEXIBILITY

FIXED WITH TRIM




TOP VIEW

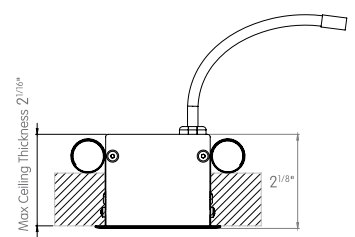


FRONT VIEW

FIXED TRIMLESS

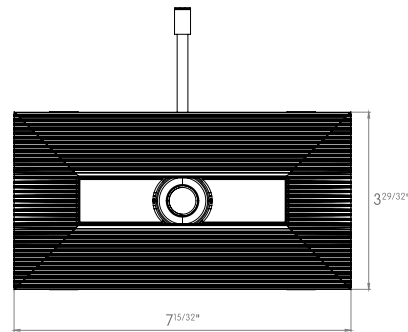


TOP VIEW

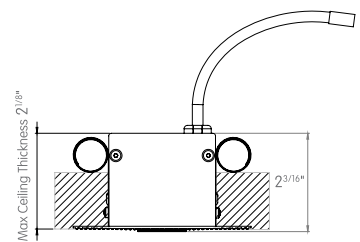


FRONT VIEW

ADJUSTABLE WITH TRIM

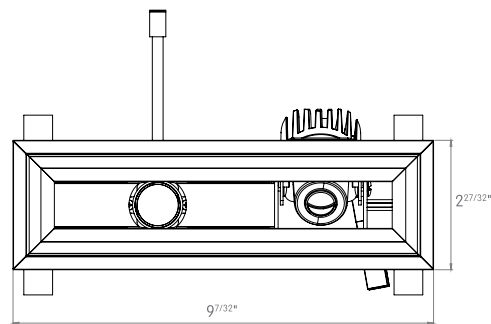


TOP VIEW




FRONT VIEW

ADJUSTABLE TRIMLESS

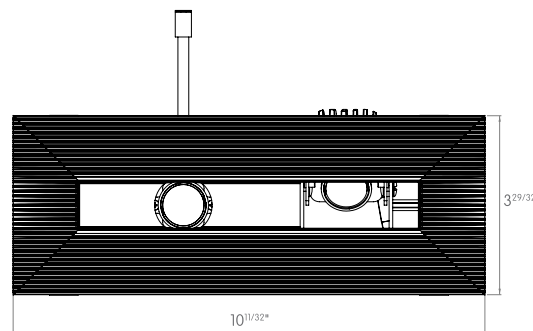

TOP VIEW



FRONT VIEW

DELIVERED LUMEN OUTPUT

Output	Watts	CRI +80				CRI +90			
APPLICATION	4W	2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K
Wallwash	4W	370lm	380lm	400lm	410lm	300lm	320lm	330lm	340lm
Fixed Downlight	4W	380lm	400lm	420lm	440lm	320lm	335lm	350lm	360lm
Adjustable Downlight	4W	380lm	400lm	420lm	440lm	320lm	335lm	350lm	360lm

	8W	2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K
Wallwash	8W	700lm	720lm	760lm	770lm	580lm	600lm	630lm	640lm
Fixed Downlight	8W	760lm	785lm	820lm	850lm	630lm	650lm	680lm	700lm
Adjustable Downlight	8W	760lm	780lm	820lm	850lm	630lm	650lm	680lm	700lm

Wallwash and Downlight Isolux

