



Ghost is a unique optical lighting system designed to disappear in a narrow 1" slot. The optics are deeply regressed to give the impression of a slim void and the mud flange provides a trimless integration in gypsum ceilings, also available with trim option. Ghost relies on indirect light reflectors and double focus lens technology to achieve glare-free optics. It offers an infinite number of optical iterations allowing transitions from a fixed downlight to an adjustable downlight, to a single wallwash and even to a double wallwash. All these optics are integrated into a compact slot for an outstanding quiet lighting effect.

- Discreet and regressed source of light
- UGR <10
- Multi-Optics configurations
- Fixed Downlight, Wallwash, and Adjustable Accent from a 30mm Slot
- Unobstructed complete beams even with 40° tilt
- Powers are 16W/ft for the Double Washer and 8W for both the Adjustable and Fixed Downlights

Washer Nomenclature : GIWH-T12W-1S1A-930-0

Series	Wallwash	Mounting	Nominal Length ¹	Body Finish	Qty - Fixed Downlight	Beam Angle	Voltage	Dimming	CRI	Color Temp	Emergency		
GIW	H Double Wallwash Hybrid	R Recessed with Trim	6	6" (Only 1 downlight)	W Textured White	1	1 Downlight per 6"	S Narrow 10°	I 120V	A Non- Dim	9 +90	27 2700K	0 No
		T Recessed Trimless	12	12" (Up to 2 downlights)	B Textured Black	2	2 Downlights per 12"	M Medium 24°	U Universal 120-277V	B 0-10V to 1%	30 3000K	9 90 mins	
					G Silver 9006		F Flood 36°		D DALI to 1%	35 3500K			
					X Custom RAL				E ELV	40 4000K			
									G ² LUTRON				

Adjustable Nomenclature : GIAH-T12W-1S1A-930-0

Series	Adjustable	Mounting	Nominal Length ¹	Body Finish	Qty - Adjustable Downlight	Beam Angle	Voltage	Dimming	CRI	Color Temp	Emergency		
GIA	H Adjustable Hybrid	R Recessed with Trim	6	6" (Only 1 downlight)	W Textured White	1	1 Downlight per 6"	S Narrow 10°	I 120V	A Non- Dim	9 +90	27 2700K	0 No
		T Recessed Trimless	12	12" (Up to 2 downlights)	B Textured Black	2	2 Downlights per 12"	M Medium 24°	U Universal 120-277V	B 0-10V to 1%	30 3000K	9 90 mins	
					G Silver 9006		F Flood 36°		D DALI to 1%	35 3500K			
					X Custom RAL				E ELV	40 4000K			
									G ² LUTRON				


Notes:
¹ For exact lengths refer to dimensions table.
² Hi-lume 1% EcoSystem Soft-on, Fade-to-Black dimming.

Consult factory for lead-times.
 Consult factory for systems using multiple optics and mounting configurations.




OPTICAL FLEXIBILITY


Photometric data: Fixed and Adjustable Polar Curves

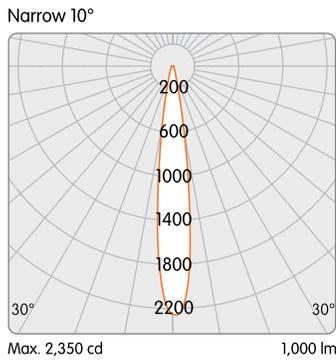


The narrow 10° beam is ideal for high-ceiling applications and for emphasizing texture on vertical surfaces and architectural elements.

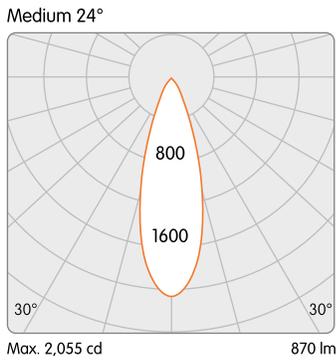


The medium 24° beam is a versatile distribution that works in a wide range of applications and spaces. This optic is a nice balance between light punch and ambient uniformity.

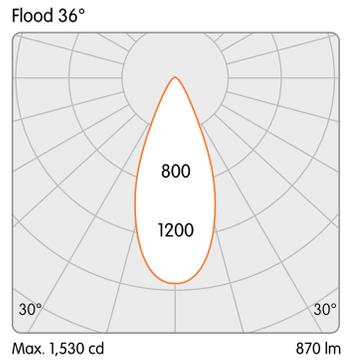


A 36° flood beam is the optimal option for achieving efficient ambient lighting with excellent uniformity and very low glare.

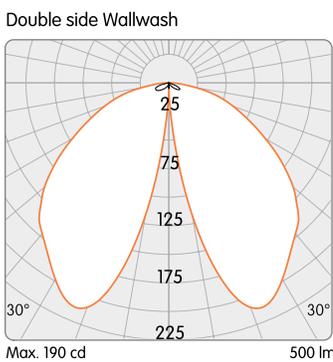


Ghost wallwash provides even illumination of vertical surfaces. This optic is ideal for washing large areas where exceptional uniformity is required.

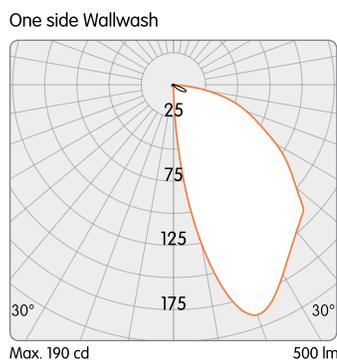


REMODEL HOUSING

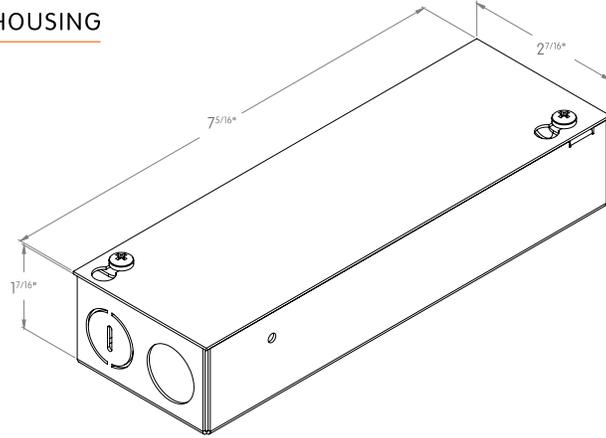

NON-IC HOUSING

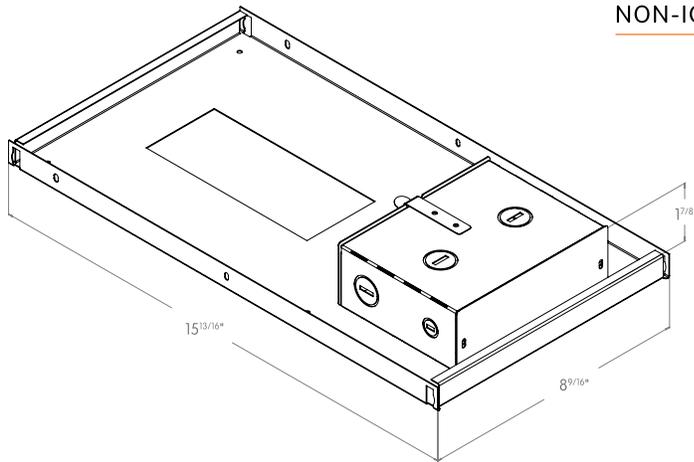


IC HOUSING & AIRTIGHT

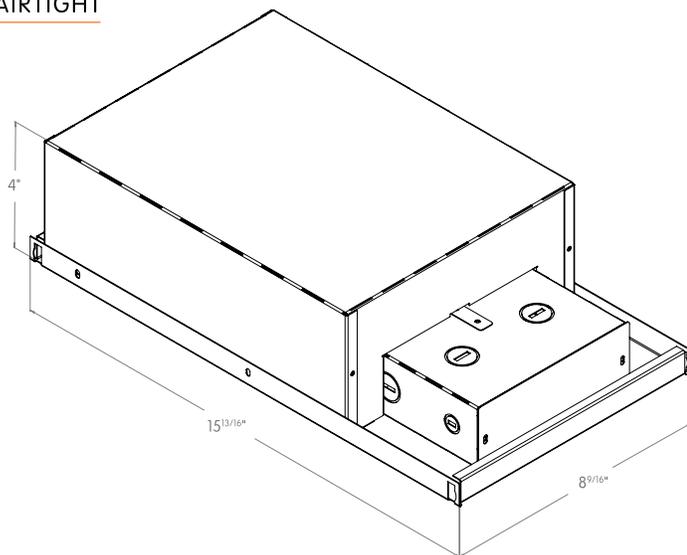


MOUNTING FLEXIBILITY

FIXED WITH TRIM

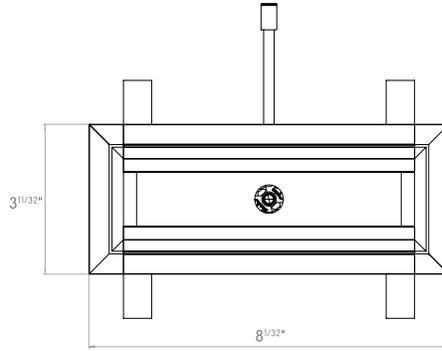


TOP VIEW

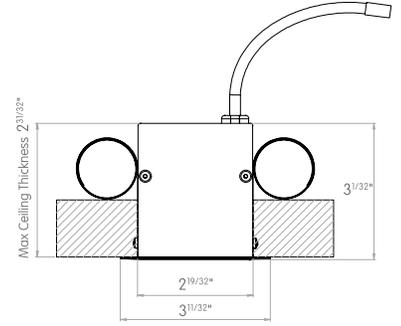


FRONT VIEW

FIXED TRIMLESS

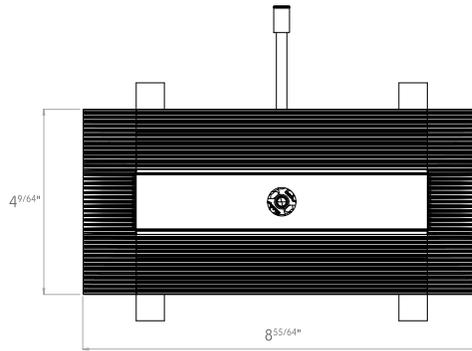


TOP VIEW

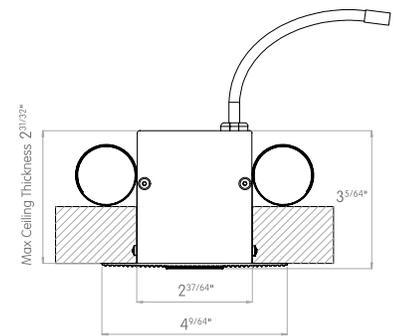


FRONT VIEW

ADJUSTABLE WITH TRIM




TOP VIEW

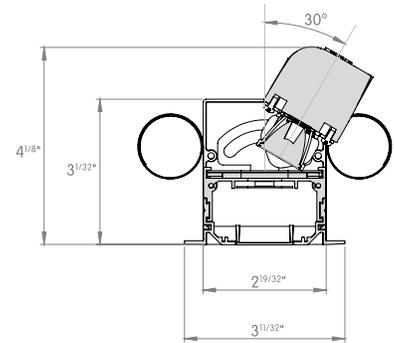


FRONT VIEW

ADJUSTABLE TRIMLESS



TOP VIEW

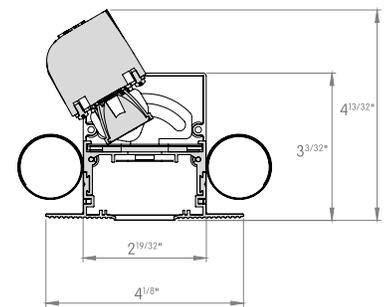

FRONT VIEW



DELIVERED LUMEN OUTPUT

Output	Watts	CRI +90			
		2700K	3000K	3500K	4000K
Adjustable Downlight	8W	630lm	650lm	680lm	700lm
		2700K	3000K	3500K	4000K
Wallwash	8W/ft	580lm	600lm	630lm	640lm
Fixed Downlight	8W	630lm	650lm	680lm	700lm

Wallwash and Downlight Isolux

