

STRATA

PROJECTOR - WALLWASH



Strata Projector is a versatile and high-performance luminaire designed to accentuate façades, architectural elements, monuments, and landscape features with controlled precision. Engineered with advanced optical technology, it delivers clean, homogeneous light beams with sharp definition and minimal spill.

A comprehensive range of optical distributions: from narrow to wide, flood and wallwash; allows designers to tailor light exactly to the application.

CONSTRUCTION

Product Type : Projector
Body Material : Aluminum
Body Finish : Black / Grey / White
 Custom RAL
IP Rating : IP66
IK Rating : IK07

INSTALLATION

Environment : Outdoor
Mounting : Surface Mounted -
 Spike Mounted - Pole Mounted

OPTICS

Optical Distribution : Wallwash

LIGHT SOURCE

Direct Light Source : COB
Luminous Output : Up to 2030lm
Light Source CCT : 3000K / 3500K / 4000K
Color Rendering Index : Ra70 - Ra80
Lifetime : L80 B10 @ 70,000 Hrs

ELECTRICAL

Input Voltage : 120V / 220V - 240V / UNV
 120-277V - 50Hz/60Hz
Driver Type : Integral
Dimming : 0-10V / DALI
Code Compliance : ETL / CSA / CE

**Note: Custom finishes require a MOQ*

Code example: **SPW** - S - B - LUD - W 8 3 0 - F

Series	Mounting	Body Finish	Output	Voltage	Dimming	Distribution	CRI	CCT	Shields
SPW	S Surface Mounted	B Black	L' 10W (950lm)	1 120V	A Non Dim	W Wallwash	7 +70	30 3000K	H 45° Snoot
	G Spike Mounted	G Grey	M' 15W (1420lm)	2 220V-240V	B 0-10V to 1%		8 +80	35 3500K	F Full Snoot
	P Pole Mounted	W White	M' 20W (1850lm)	U Universal 120 to 277V	D Dali to 1%			40 4000K	O No Snoot
		X Custom RAL							

Notes:
 † Denotes output at 3000K, unless otherwise noted.


Consult factory for lead-times.
 Consult factory for systems using multiple optics and mounting configurations.



Bold Lighting
 1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
 info@boldlighting.us www.boldlighting.us t: +1-678-903-4061


PROJECTOR WALLWASH

Wallwash

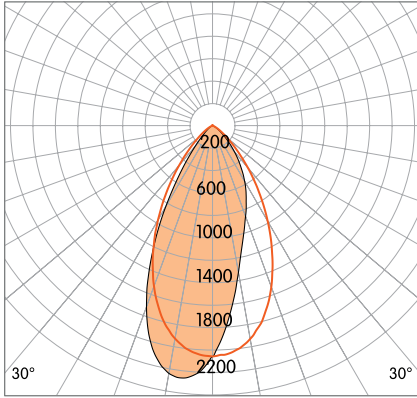


MOUNTING FLEXIBILITY
Per Millimeter

SURFACE MOUNTED

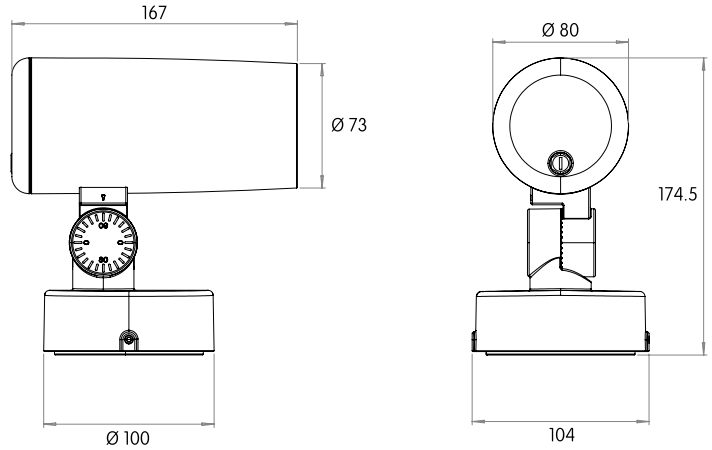


SPIKE MOUNTED

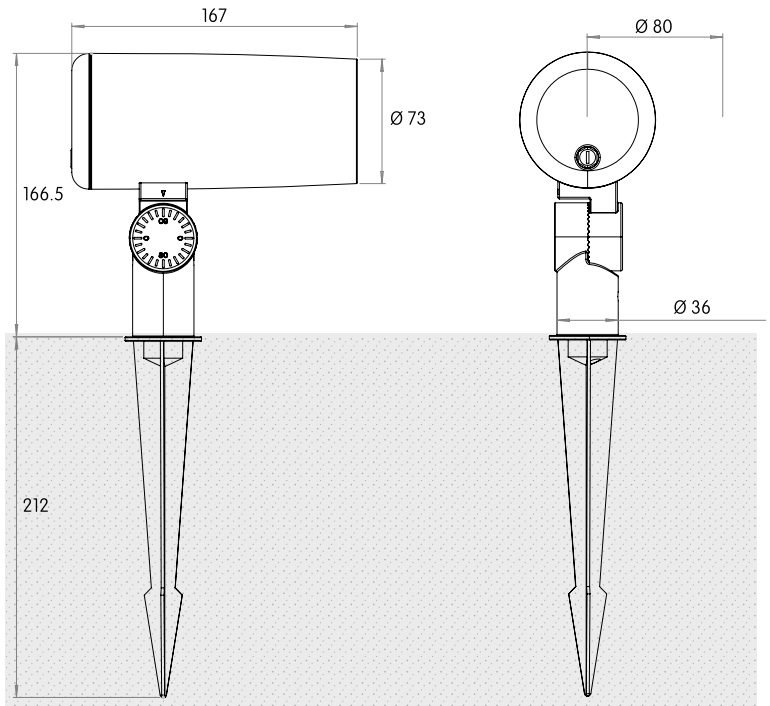

MOUNTING FLEXIBILITY
Per Millimeter

POLE MOUNTED

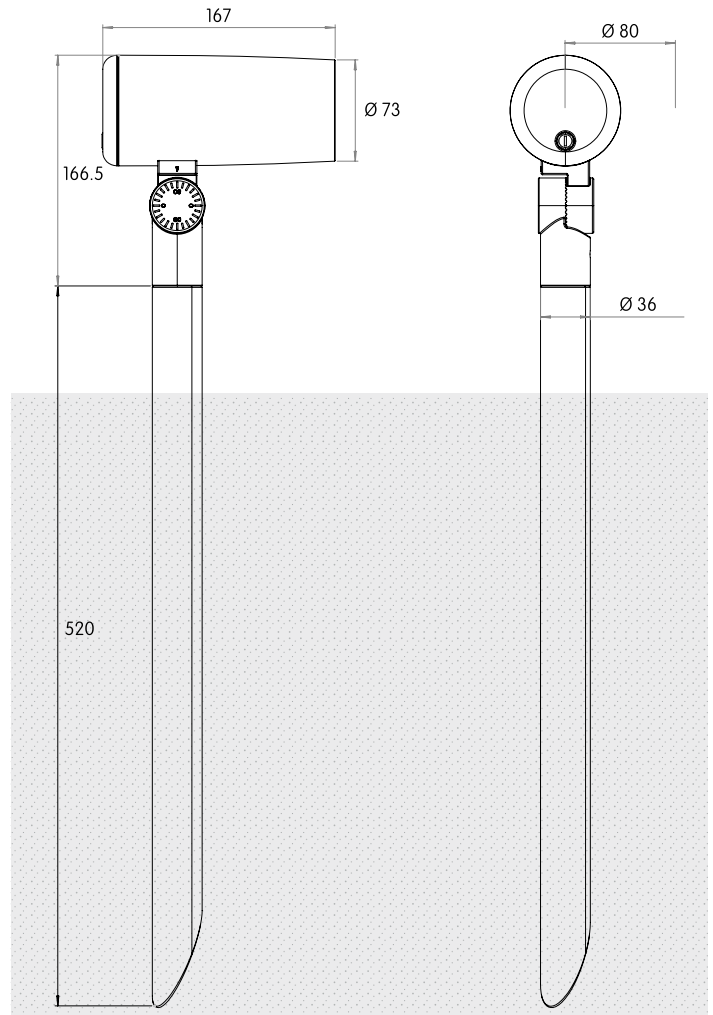

DELIVERED LUMEN OUTPUT

Output		Watts			
STATIC-WHITE		3000K	3500K	4000K	
L	10W	950 lm	990 lm	1030 lm	
M	20W	1420 lm	1490 lm	1560 lm	
H	30W	1850 lm	1940 lm	2030 lm	

