

specter

SNOOT 0

bold

lighting



SNOOT 0

Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature. The snoot module complements the SPECTER range with a minimalistic cylinder track-head equipped with a wide range of optics and optical accessories allowing professional scenography lighting.


- Up to 1,800lm delivered output
- Available in 3 diameter sizes, 1.5"
- Various optical accessories available such as beam shaping lenses and Honeycomb louvers
- Beam options, narrow, medium, Flood and wide
- Fixtures designed to mount in SPECTER track
- Available in 4 standard finishes: Black, white, silver and bronze

Notes: ¹ Available dimming 0-10V and DALI

Code example: **SNT** - 1 - 9 2 7 - M - B L

Size / Output*			CRI		CCT.		Beam		Finish	
0	Diameter 1.5"	485lm (5W)	8	+80	27	2700K	N	20°	WH	Flat White
			9	+90	30	3000K	M	30°	BL	Flat Black
					35	3500K	F	40°	SL	Silver
					40	4000K	W	60°	BZ	Bronze

STANDARD FINISHES

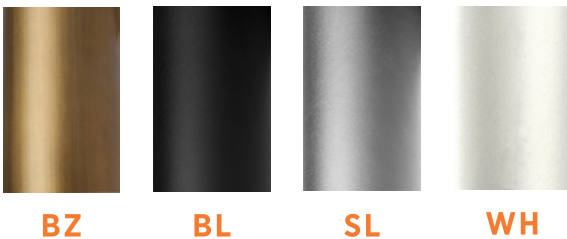

BZ

BL

SL

WH

DELIVERED LUMEN OUTPUT

Size	Watts	CRI +80			CRI +90		
		2700K	3000K	4000K	2700K	3000K	4000K
0	8W	670lm	744lm	876lm	630lm	700lm	824lm




Bold Lighting
 4710 Ecton Dr. Unit F & G, Marietta, GA 30066, USA
 info@boldlighting.us www.boldlighting.us
 t: +1 833-BOLD-1-US +1 833-265-3187

OPTICAL FLEXIBILITY


Photometric data: Type C Polar Curves

20° Beam Angle




Max. 6,987 cd 1,000 lm

30° Beam Angle




Max. 3,550 cd 1,000 lm

40° Beam Angle





Max. 3,040 cd 1,000 lm

60° Beam Angle




Max. 1,835 cd 1,000 lm

SNOOT 0

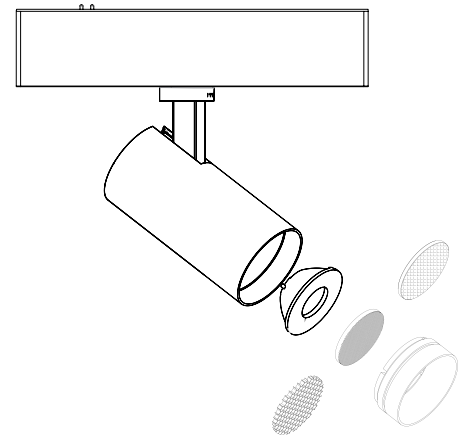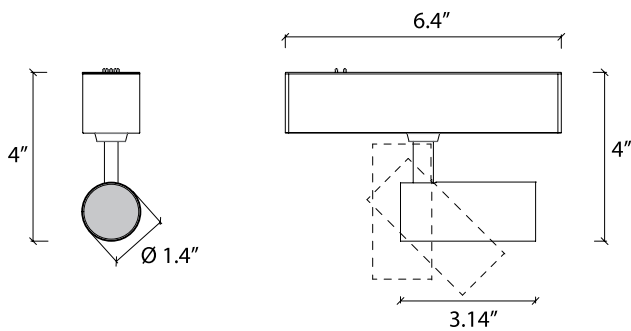

OPTICAL ACCESSORIES

Lenses and anti-glare devices

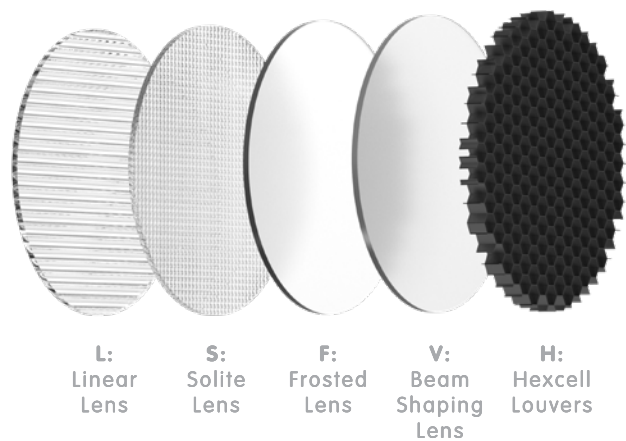

Fits model # / Size		Beam		Finish	
Snoot 0	Diameter 1.5"	S	Solite	—	None
		L	Linear	BL	Flat Black
		F	Frosted	SL	Silver
		V	Beam Shaping	WH	White
		H	Hexcell Louvers		

Beam Shaping lenses Options

	No Filter Beam Shaping Filter	C-HE10	C-HE15	C-HE20	C-HE30	C-HE40	C-HE55	C-HE80
FWHM Beam Angle	15°	18°	21°	25°	35°	46°	65°	80°

Special Beam Shapes	No Filter Beam Shaping Filter	Elliptical 6010	Elliptical 6030	Direction Turning 8°	Direction Turning 20°	C-HE40	C-HE55	C-HE80
FWHM Beam Angle	15°	60° x 10°	60° x 30°	▷ 8°	▷ 20°	46°	65°	80°