

specter

SNOOT 1 & 2

bold
lighting



SNOOT 1



SNOOT 2

Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature. The snoot module complements the SPECTER range with a minimalistic cylinder track-head equipped with a wide range of optics and optical accessories allowing professional scenography lighting.

- Up to 1,800lm delivered output
- Available in 3 diameter sizes, 2" and 2.8"
- Various optical accessories available such as beam shaping lenses and Honeycomb louvers
- Beam options, narrow, medium, Flood and wide
- Fixtures designed to mount in SPECTER track
- Available in 4 standard finishes: Black, white, silver and bronze


Notes: ¹ Available dimming 0-10V and DALI

Code example: **SNT**-1-9 2 7 - M - B L

Size / Output*			CRI		CCT.		Beam		Finish	
1	Diameter 2"	700lm (10W)	8	+80	27	2700K	N	18°	WH	Flat White
2	Diameter 2.8"	1623lm (20W)	9	+90	30	3000K	M	24°	BL	Flat Black
					35	3500K	F	36°	SL	Silver
					40	4000K	W ²	50°	BZ	Bronze

Notes: ² The (W 50°) beam angle is not available for SNOOT 2

STANDARD FINISHES

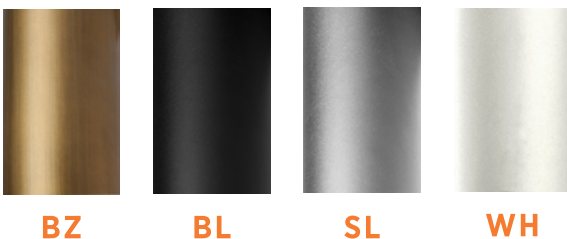

BZ

BL

SL

WH


DELIVERED LUMEN OUTPUT

Size	Watts	CRI +80			CRI +90		
		2700K	3000K	4000K	2700K	3000K	4000K
1	15W	1100lm	1222lm	1438lm	1040lm	1156lm	1359lm
2	20W	1620lm	1800lm	2118lm	1470lm	1633lm	1922lm




Bold Lighting
4710 Ecton Dr. Unit F & G, Marietta, GA 30066, USA
info@boldlighting.us www.boldlighting.us
t: +1-678-903-4061

18° Beam Angle




Max. 6,987 cd 1,000 lm

24° Beam Angle




Max. 3,550 cd 1,000 lm

36° Beam Angle




Max. 3,040 cd 1,000 lm

50° Beam Angle




Max. 1,835 cd 1,000 lm

SNOOT 1

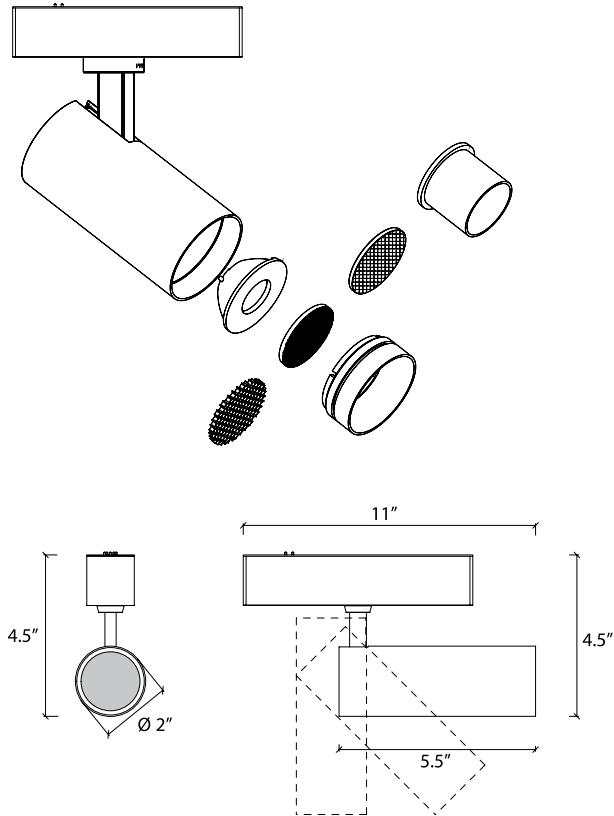


SNOOT 2

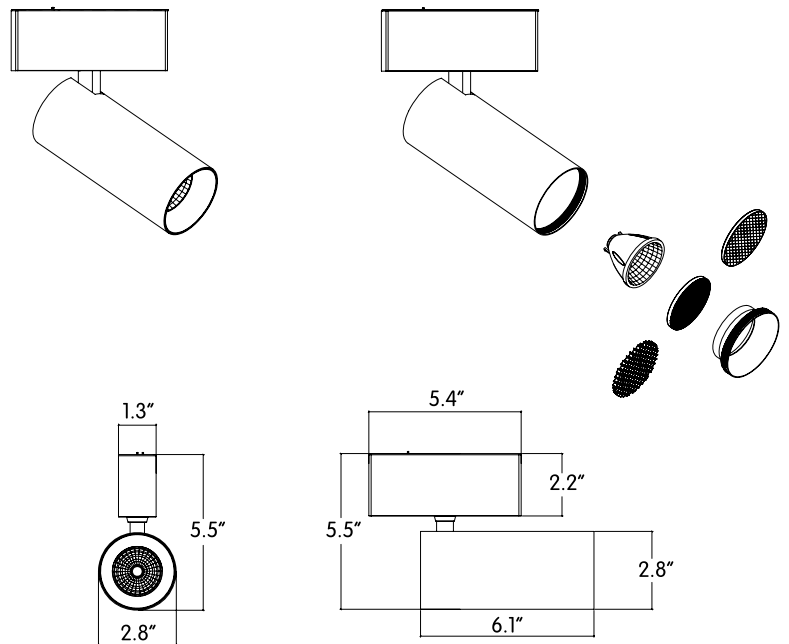

OPTICAL ACCESSORIES

Lenses and anti-glare devices

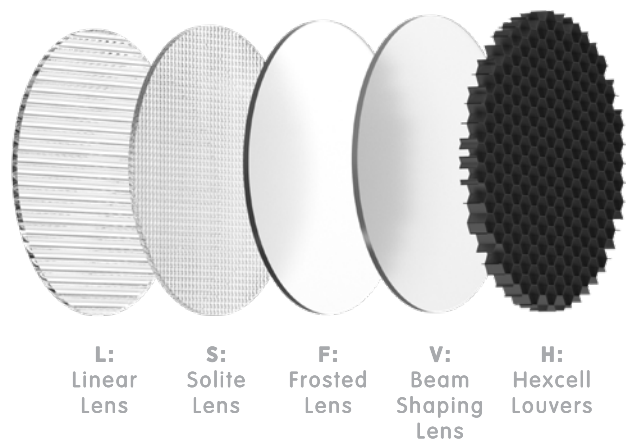

Fits model # / Size		Beam		Finish	
Snoot 1	Diameter 2"	S	Solite	—	None
Snoot 2	Diameter 2.8"	L	Linear	BL	Flat Black
		F	Frosted	SL	Silver
		V	Beam Shaping	WH	White
		H	Hexcell Louvers		

Beam Shaping lenses Options

	No Filter Beam Shaping Filter	C-HE10	C-HE15	C-HE20	C-HE30	C-HE40	C-HE55	C-HE80
FWHM Beam Angle	15°	18°	21°	25°	35°	46°	65°	80°

Special Beam Shapes	No Filter Beam Shaping Filter	Elliptical 6010	Elliptical 6030	Direction Turning 8°	Direction Turning 20°	C-HE40	C-HE55	C-HE80
FWHM Beam Angle	15°	60° x 10°	60° x 30°	▷ 8°	▷ 20°	46°	65°	80°