

# specter

SPECTER STANDARD MODULES  
BREAK LINE

**bold**  
lighting



BREAK LINE

Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature. The BREAK module offers a wide range of optics along with a tilt up to 90° allowing the illumination of both horizontal or vertical planes.


- ☐ Up to 1535lm delivered output
- ☐ Available in 3 sizes, 3", 6" and 12"
- ☐ Adjustable tilt to 90°
- ☐ Available in Opal lens
- ☐ Lambertian beam angle
- ☐ Fixtures designed to mount in SPECTER track
- ☐ For fixture dimming refer to track driver specifications<sup>1</sup>
- ☐ Available in 4 standard finishes: Black, white, silver and bronze

Notes: <sup>1</sup> Dimming options, 0-10V, ELV and DALI

Code example: **SPSF-J03W-L927-2**

Series		Length		Body Finish		Beam Angle		CRI		Color Temp		Circuit	
SPSF-J	03	3"	W	White	L	120°	9	+90	27	2700K	1	1-Circuit	
	06	6"	B	Black					30	3000K	2	2-Circuit	
	12	12"	S	Silver					35	3500K			
			Z	Bronze					40	4000K			
			X	Custom									

## STANDARD FINISHES

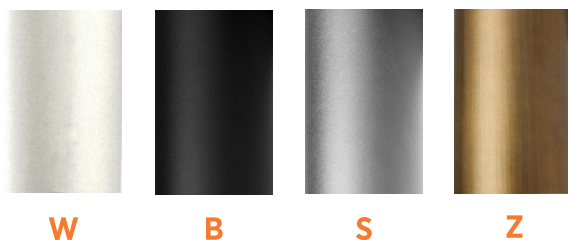


## DELIVERED LUMEN OUTPUT

Length		Watts	CRI +90			
			2700K	3000K	3500K	4000K
3"	4W		200lm	222lm	244lm	269lm
6"	8W		439lm	487lm	536lm	590lm
12"	16W		1142lm	1269lm	1396lm	1535lm




**Bold Lighting**  
4710 Ecton Dr., Marietta, GA 30066, USA  
info@boldlighting.us www.boldlighting.us  
t: +1-678-903-4061

Photometric data:  
Type C Polar Curves

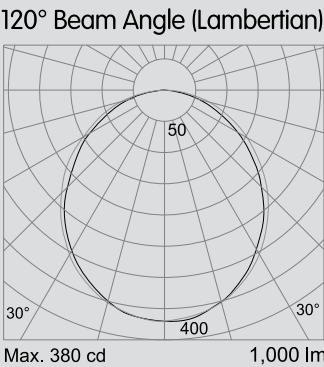

BREAK LINE 6

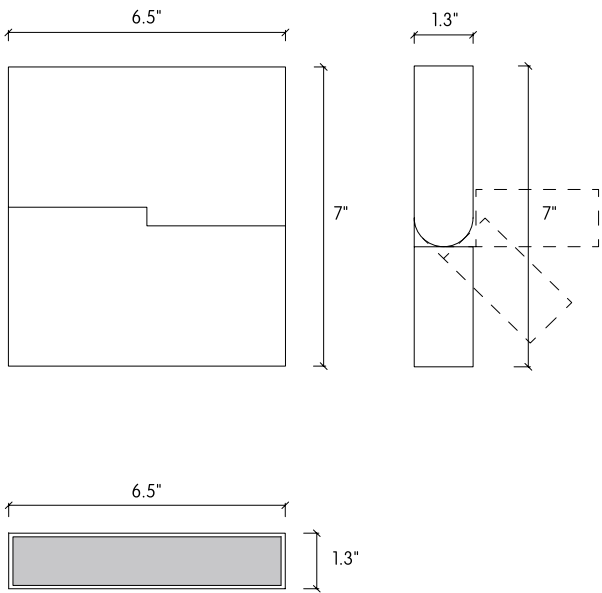

BREAK LINE 12

