



BREAK LINE


Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature. The BREAK module offers a wide range of optics along with a tilt up to 90° allowing the illumination of both horizontal or vertical planes.

- Up to 1904lm delivered output
- Available in 3 sizes, 3", 6" and 12"
- Adjustable tilt to 90°
- Available in Opal lens
- Lambertian beam angle
- Fixtures designed to mount in SPECTER track
- For fixture dimming refer to track driver specifications¹
- Available in 4 standard finishes: Black, white, silver and bronze

Notes: ¹ Dimming options, 0-10V, ELV and DALI

Code example: **SPSF-J03W-W-L827-2**

STANDARD FINISHES

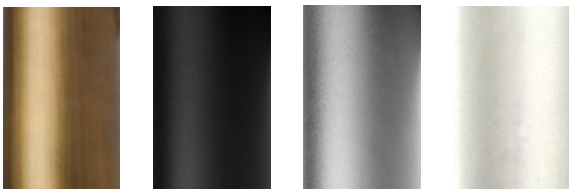

Z

B

S

W


DELIVERED LUMEN OUTPUT

Length	Watts	CRI +80				CRI +90			
		2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K
3"	4W	248lm	275lm	303lm	333lm	200lm	222lm	244lm	269lm
6"	8W	544lm	604lm	665lm	731lm	439lm	487lm	536lm	590lm
12"	16W	1416lm	1574lm	1731lm	1904lm	1142lm	1269lm	1396lm	1535lm



Series	Length		Body Finish		Baffle Finish		Beam Angle		CRI		Color Temp		Circuit					
SPSF-J	03	3"	W	White	W	White	L	120°	8	+80	27	2700K	1	1-Circuit				
	06	6"	B	Black	B	Black					9	+90			30	3000K	2	2-Circuit
	12	12"	S	Silver	S	Silver					35	3500K						
			Z	Bronze	Z	Bronze									40	4000K		
			X	Custom	X	Custom												

Photometric data:
Type C Polar Curves

120° Beam Angle (Lambertian)



BREAK LINE 6

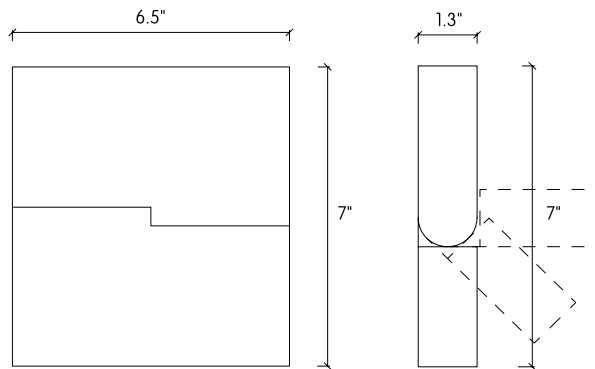

BREAK LINE 12

