


# specter

SPECTER CURVE MODULES  
UNDROP LINE

**bold**  
lighting

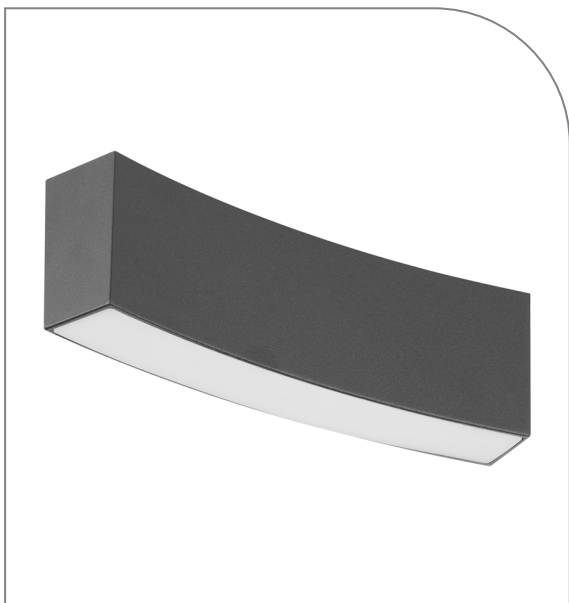

UNDROP LINE

Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature.

The Undrop module offers a quietly recessed fixture configuration, flush with the face of the track. It comes with a wide range of lengths and optics, allowing the illumination of both horizontal or vertical planes, at different ceiling heights, ranging from a single level to a tall triple level atrium.


- ☐ Up to 582lm delivered output
- ☐ Available in 1 size, 6"
- ☐ Available in Opal lens
- ☐ Fixtures designed to mount in SPECTER track
- ☐ Available in 4 standard finishes: Black, white, silver and bronze

Notes: <sup>1</sup> Available dimming 0-10V and DALI

Code example: **SPSH-O**06W-L927-2

Series	Length		Body Finish		Beam Angle		CRI		Color Temp		Circuit	
<b>SPSH-O</b>	<b>06</b>	6"	<b>W</b>	White	<b>L</b>	120°	<b>9</b>	+90	<b>27</b>	2700K	<b>1</b>	1-Circuit
			<b>B</b>	Black					<b>30</b>	3000K	<b>2</b>	2-Circuit
			<b>S</b>	Silver					<b>35</b>	3500K		
			<b>Z</b>	Bronze					<b>40</b>	4000K		
			<b>X</b>	Custom								

## STANDARD FINISHES

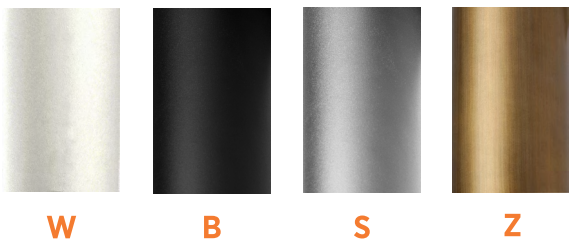


## DELIVERED LUMEN OUTPUT

Length		Watts	CRI +90			
			2700K	3000K	3500K	4000K
6"	7W		433lm	481lm	529lm	582lm



**Bold Lighting**  
4710 Ecton Dr., Marietta, GA 30066, USA  
info@boldlighting.us www.boldlighting.us  
t: +1-678-903-4061

Photometric data:  
Type C Polar Curves

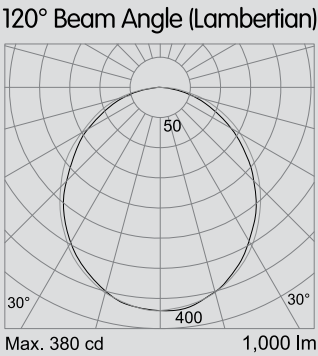

UNDROP LINE

