

# specter

SPECTER SLIM MODULES  
BREAK LINE

**bold**  
lighting



BREAK LINE


Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature. The BREAK module offers a wide range of optics along with a tilt up to 90° allowing the illumination of both horizontal or vertical planes.

- Up to 1043lm delivered output
- Available in 2 sizes, 4" and 8"
- Available in Opal lens
- Fixtures designed to mount in SPECTER track
- Available in 4 standard finishes: Black, white, silver and bronze

Notes: <sup>1</sup> Available dimming 0-10V and DALI

Code example: **SPSM-J**04W-W-L827-2

## STANDARD FINISHES

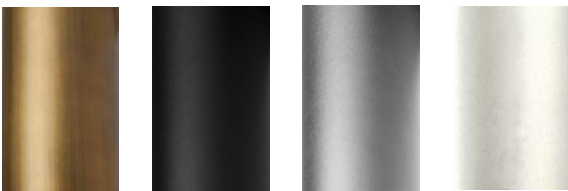

Z

B

S

W

## DELIVERED LUMEN OUTPUT

Length	Watts	CRI +80				CRI +90			
		2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K
4"	8W	346lm	384lm	423lm	465lm	279lm	310lm	341lm	375lm
8"	16W	776lm	862lm	948lm	1043lm	626lm	695lm	765lm	841lm

Series	Length		Body Finish		Baffle Finish		Beam Angle		CRI		Color Temp		Circuit	
<b>SPSM-J</b>	04	4"	W	White	W	White	L	120°	8	+80	27	2700K	1	1-Circuit
	08	8"	B	Black	B	Black			9	+90	30	3000K	2	2-Circuit
			S	Silver	S	Silver	35	3500K						
			Z	Bronze	Z	Bronze	40	4000K						
			X	Custom	X	Custom								




**Bold Lighting**  
4710 Ecton Dr., Marietta, GA 30066, USA  
info@boldlighting.us www.boldlighting.us  
t: +1-678-903-4061




OPTICAL FLEXIBILITY

Photometric data:  
Type C Polar Curves

120° Beam Angle (Lambertian)



BREAK LINE 4



BREAK LINE 8

