

# specter

SPECTER STANDARD MODULES  
UNDROP DOT

**bold**  
lighting



UNDROP DOT


Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature. The Undrop module offers a quietly recessed fixture configuration, flush with the face of the track. It comes with a wide range of lengths and optics, allowing the illumination of both horizontal or vertical planes, at different ceiling heights, ranging from a single level to a tall triple level atrium.

- Up to 1900lm delivered output
- Available in 3 standard lengths 3", 6", 12". (Consult factory for longer sections)
- Available in Low glare baffles
- Fixtures designed to mount in SPECTER track
- Available in 4 standard finishes: Black, white, silver and bronze

Notes: <sup>1</sup> Available dimming 0-10V and DALI

Code example: **SPSF-U03W-W-N827-2**

## STANDARD FINISHES

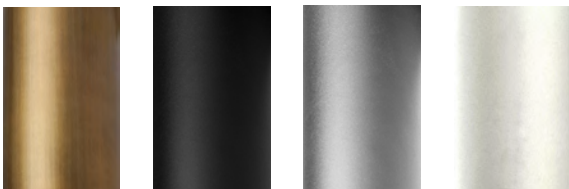

**Z**

**B**

**S**

**W**

## DELIVERED LUMEN OUTPUT

Length	Watts	CRI +80				CRI +90			
		2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K
3"	4W	405lm	450lm	495lm	544lm	326lm	363lm	399lm	439lm
6"	8W	668lm	743lm	817lm	899lm	539lm	599lm	659lm	725lm
12"	16W	1413lm	1570lm	1727lm	1900lm	1139lm	1266lm	1393lm	1532lm

Series	Length		Body Finish		Baffle Finish		Beam Angle		CRI		Color Temp		Circuit	
<b>SPSF-U</b>	<b>03</b>	3"	<b>W</b>	White	<b>W</b>	White	<b>N</b>	12°	<b>8</b>	+80	<b>27</b>	2700K	<b>1</b>	1-Circuit
	<b>06</b>	6"	<b>B</b>	Black	<b>B</b>	Black	<b>M</b>	24°	<b>9</b>	+90	<b>30</b>	3000K	<b>2</b>	2-Circuit
	<b>12</b>	12"	<b>S</b>	Silver	<b>S</b>	Silver	<b>F</b>	36°			<b>35</b>	3500K		
			<b>Z</b>	Bronze	<b>Z</b>	Bronze					<b>40</b>	4000K		
			<b>X</b>	Custom	<b>X</b>	Custom								




**Bold Lighting**  
4710 Ecton Dr., Marietta, GA 30066, USA  
info@boldlighting.us www.boldlighting.us  
t: +1-678-903-4061


Photometric data:  
Type C Polar Curves

UNDROP DOT 3

12° Beam Angle




Max. 6,987 cd 1,000 lm

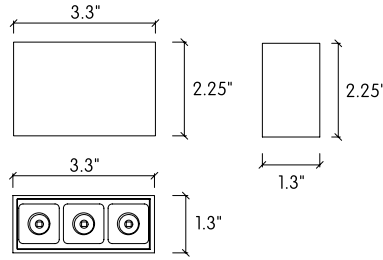


UNDROP DOT 6

24° Beam Angle




Max. 3,550 cd 1,000 lm

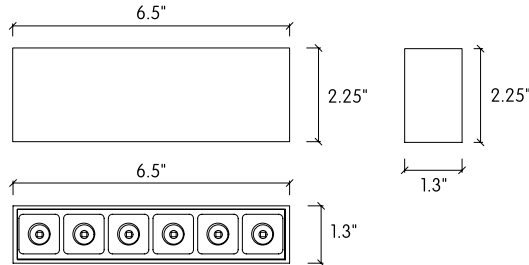

UNDROP DOT 12

36° Beam Angle



Max. 3,040 cd 1,000 lm

