

# specter

SPECTER STANDARD MODULES  
UNDROP DOT

**bold**  
lighting



UNDROP DOT

Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature.

The Undrop module offers a quietly recessed fixture configuration, flush with the face of the track. It comes with a wide range of lengths and optics, allowing the illumination of both horizontal or vertical planes, at different ceiling heights, ranging from a single level to a tall triple level atrium.


- Up to 1532lm delivered output
- Available in 3 standard lengths 3", 6", 12". (Consult factory for longer sections)
- Available in Low glare baffles
- Fixtures designed to mount in SPECTER track
- Available in 4 standard finishes: Black, white, silver and bronze
- Standard black baffles, custom colors are available upon request. Consult factory for adder cost and lead-times

Notes: <sup>1</sup> Available dimming 0-10V and DALI

Code example: **SPSF-U**03**W-B**-N927-2

Series		Length		Body Finish		Baffle Finish		Beam Angle		CRI	Color Temp		Circuit	
SPSF-U	03	3"	W	White	B	Black	N	12°	9	+90	27	2700K	1	1-Circuit
	06	6"	B	Black	X	Custom	M	24°			30	3000K	2	2-Circuit
	12	12"	S	Silver			F	36°			35	3500K		
			Z	Bronze							40	4000K		
			X	Custom										

## STANDARD FINISHES

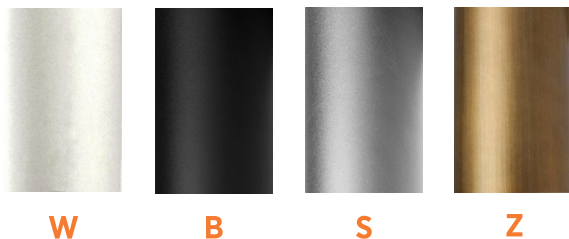

**W**

**B**

**S**

**Z**

## DELIVERED LUMEN OUTPUT


Length		Watts	CRI +90			
			2700K	3000K	3500K	4000K
3"	4W		326lm	363lm	399lm	439lm
6"	8W		539lm	599lm	659lm	725lm
12"	16W		1139lm	1266lm	1393lm	1532lm




**Bold Lighting**  
4710 Ecton Dr., Marietta, GA 30066, USA  
info@boldlighting.us www.boldlighting.us  
t: +1-678-903-4061

Photometric data:  
Type C Polar Curves


12° Beam Angle




24° Beam Angle




36° Beam Angle



UNDROP DOT 3

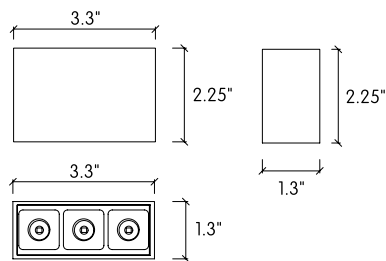

UNDROP DOT 6

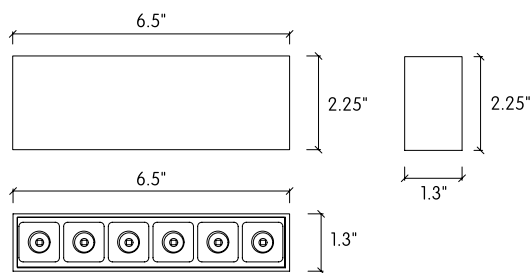

UNDROP DOT 12

