


Product Code												
U6			16				67			I		
Series	Mounting	Optic	Beam	CCT	Output	Control Gear	IP	Body finish	Emergency	Layout	Length	Wiring
U6	IS ID	GB GG GW	16	827 830 840 927 930 8WD	P1 P2 P3	A B D F	67	BS WS GS	N	I	12 24 36 48 60 C00	T1 T2

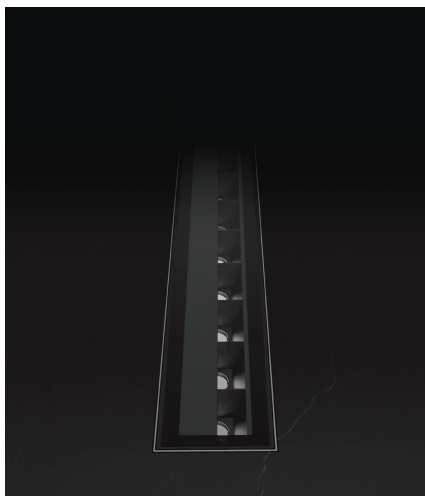

The U60 Lightway grazing baffles (available in black, white or grey) are optically engineered to offer best-in-class grazing capabilities. The luminaire was designed as a tool for designers to emphasize rough-textured surfaces up to 15ft. (5m) high.

The specially-designed Anti-glare optics control glare, exceptionally, from both the longitudinal and transversal sides of the profile, achieving a powerful effect.

Ideal for surfaces of great height, for indoor hospitality applications, or heritage and brick architecture.

The grazing effect starts from the Zero point of the wall.

Our linear range abides by our 'simplicity in all matters' philosophy. Our team's distinctive approach to product design has given birth to an innovative breed of easy-to-configure systems for sustainable indoor and outdoor lighting. High in performance, VICE grazing luminaires bring architectural details to life for any interior or exterior applications. This range is specially designed to add character to your space by emphasizing on the surface texture, thus accentuating the contrast between highlights and shadows.

## Mounting

- IS:** Recessed  
inground shallow\*
- ID:** Recessed  
inground deep

## Optic

- GB:** Black Grazing Baffles  
**GW:** White Grazing Baffles  
**GG:** Grey Grazing Baffles

## Beam

- 16:** 16°

## CCT

- 8WD:** 1800K - 2780K  
**827:** 2700K, CRI +80  
**830:** 3000K, CRI +80  
**835:** 3500K, CRI +80  
**840:** 4000K, CRI +80  
**927:** 2700K, CRI +90  
**930:** 3000K, CRI +90

\*For optimal light uniformity  
Shallow housing is recommended  
for continuous runs not exceeding  
10ft.

## Output (Delivered, 3,000K CRI +80)

- P1:** 6W/ft, 400 lm / ft.  
**P2:** 9W/ft, 550 lm / ft.  
**P3:** 13W/ft, 750 lm / ft.

## Control gear

- A:** NON DIM / ECG  
**B:** 0 TO 10 DIM  
**D:** DALI  
**F:** 2 Wires Phase Dimming

## IP

- 67:** IP67

## Body finish

- BS:** Black Smooth  
**WS:** White Smooth  
**GS:** Grey Smooth

## Emergency

- N:** No emergency

## Layout

- I:** I shape

## Length \*

- 12:** 12<sup>3/4</sup>"  
**24:** 24<sup>1/4</sup>"  
**36:** 35<sup>3/4</sup>"  
**48:** 47<sup>1/2</sup>"  
**60:** 59<sup>1/4</sup>"

**C00:** Custom  
For custom length,  
please note length  
in Inches

\*These are rounded values,  
please refer to installation  
manual for exact dimensions.


## Wiring

- T1:** Stand Alone  
**T2:** Through Wiring


# LIGHTWAY INGROUND - GRAZING BAFFLES

## Photometric Data:

GRAZING BAFFLES BLACK, LENS 16°

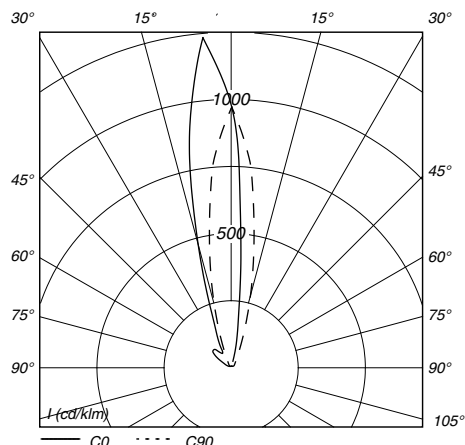


TOP VIEW

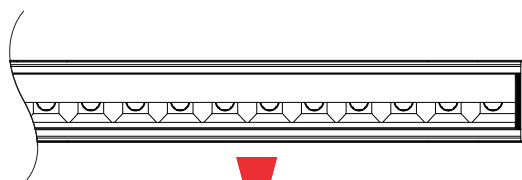

WALL SIDE


## Mounting ratio:

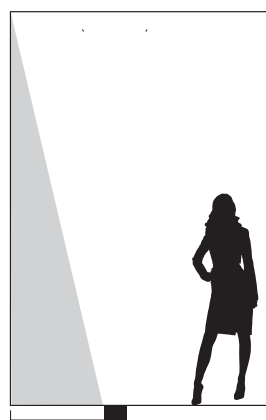


Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

Leave 4" with adjacent wall

## Sections:

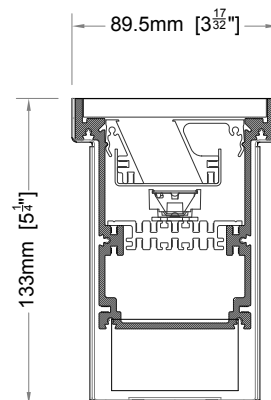

Deep Housing

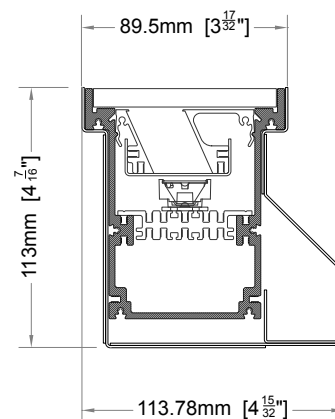


Shallow Housing

Please refer to next page

		CRI 80			
		2700K	3000K	3500K	4000 K
P1	6 W/ft	176 Lm/ft	176 Lm/ft	184 Lm/ft	192 Lm/ft
P2	9 W/ft	257 Lm/ft	241 Lm/ft	257 Lm/ft	273 Lm/ft
P3	13 W/ft	289 Lm/ft	305 Lm/ft	337 Lm/ft	369 Lm/ft


Electrical: 120 - 277 V ; 50 - 60 Hz


Phase DIM

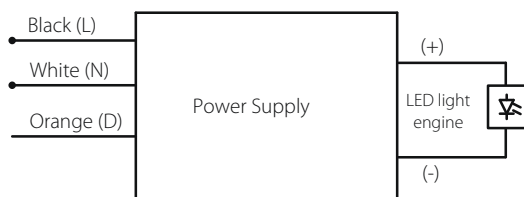

1 To 10V DIM / DALI DIM



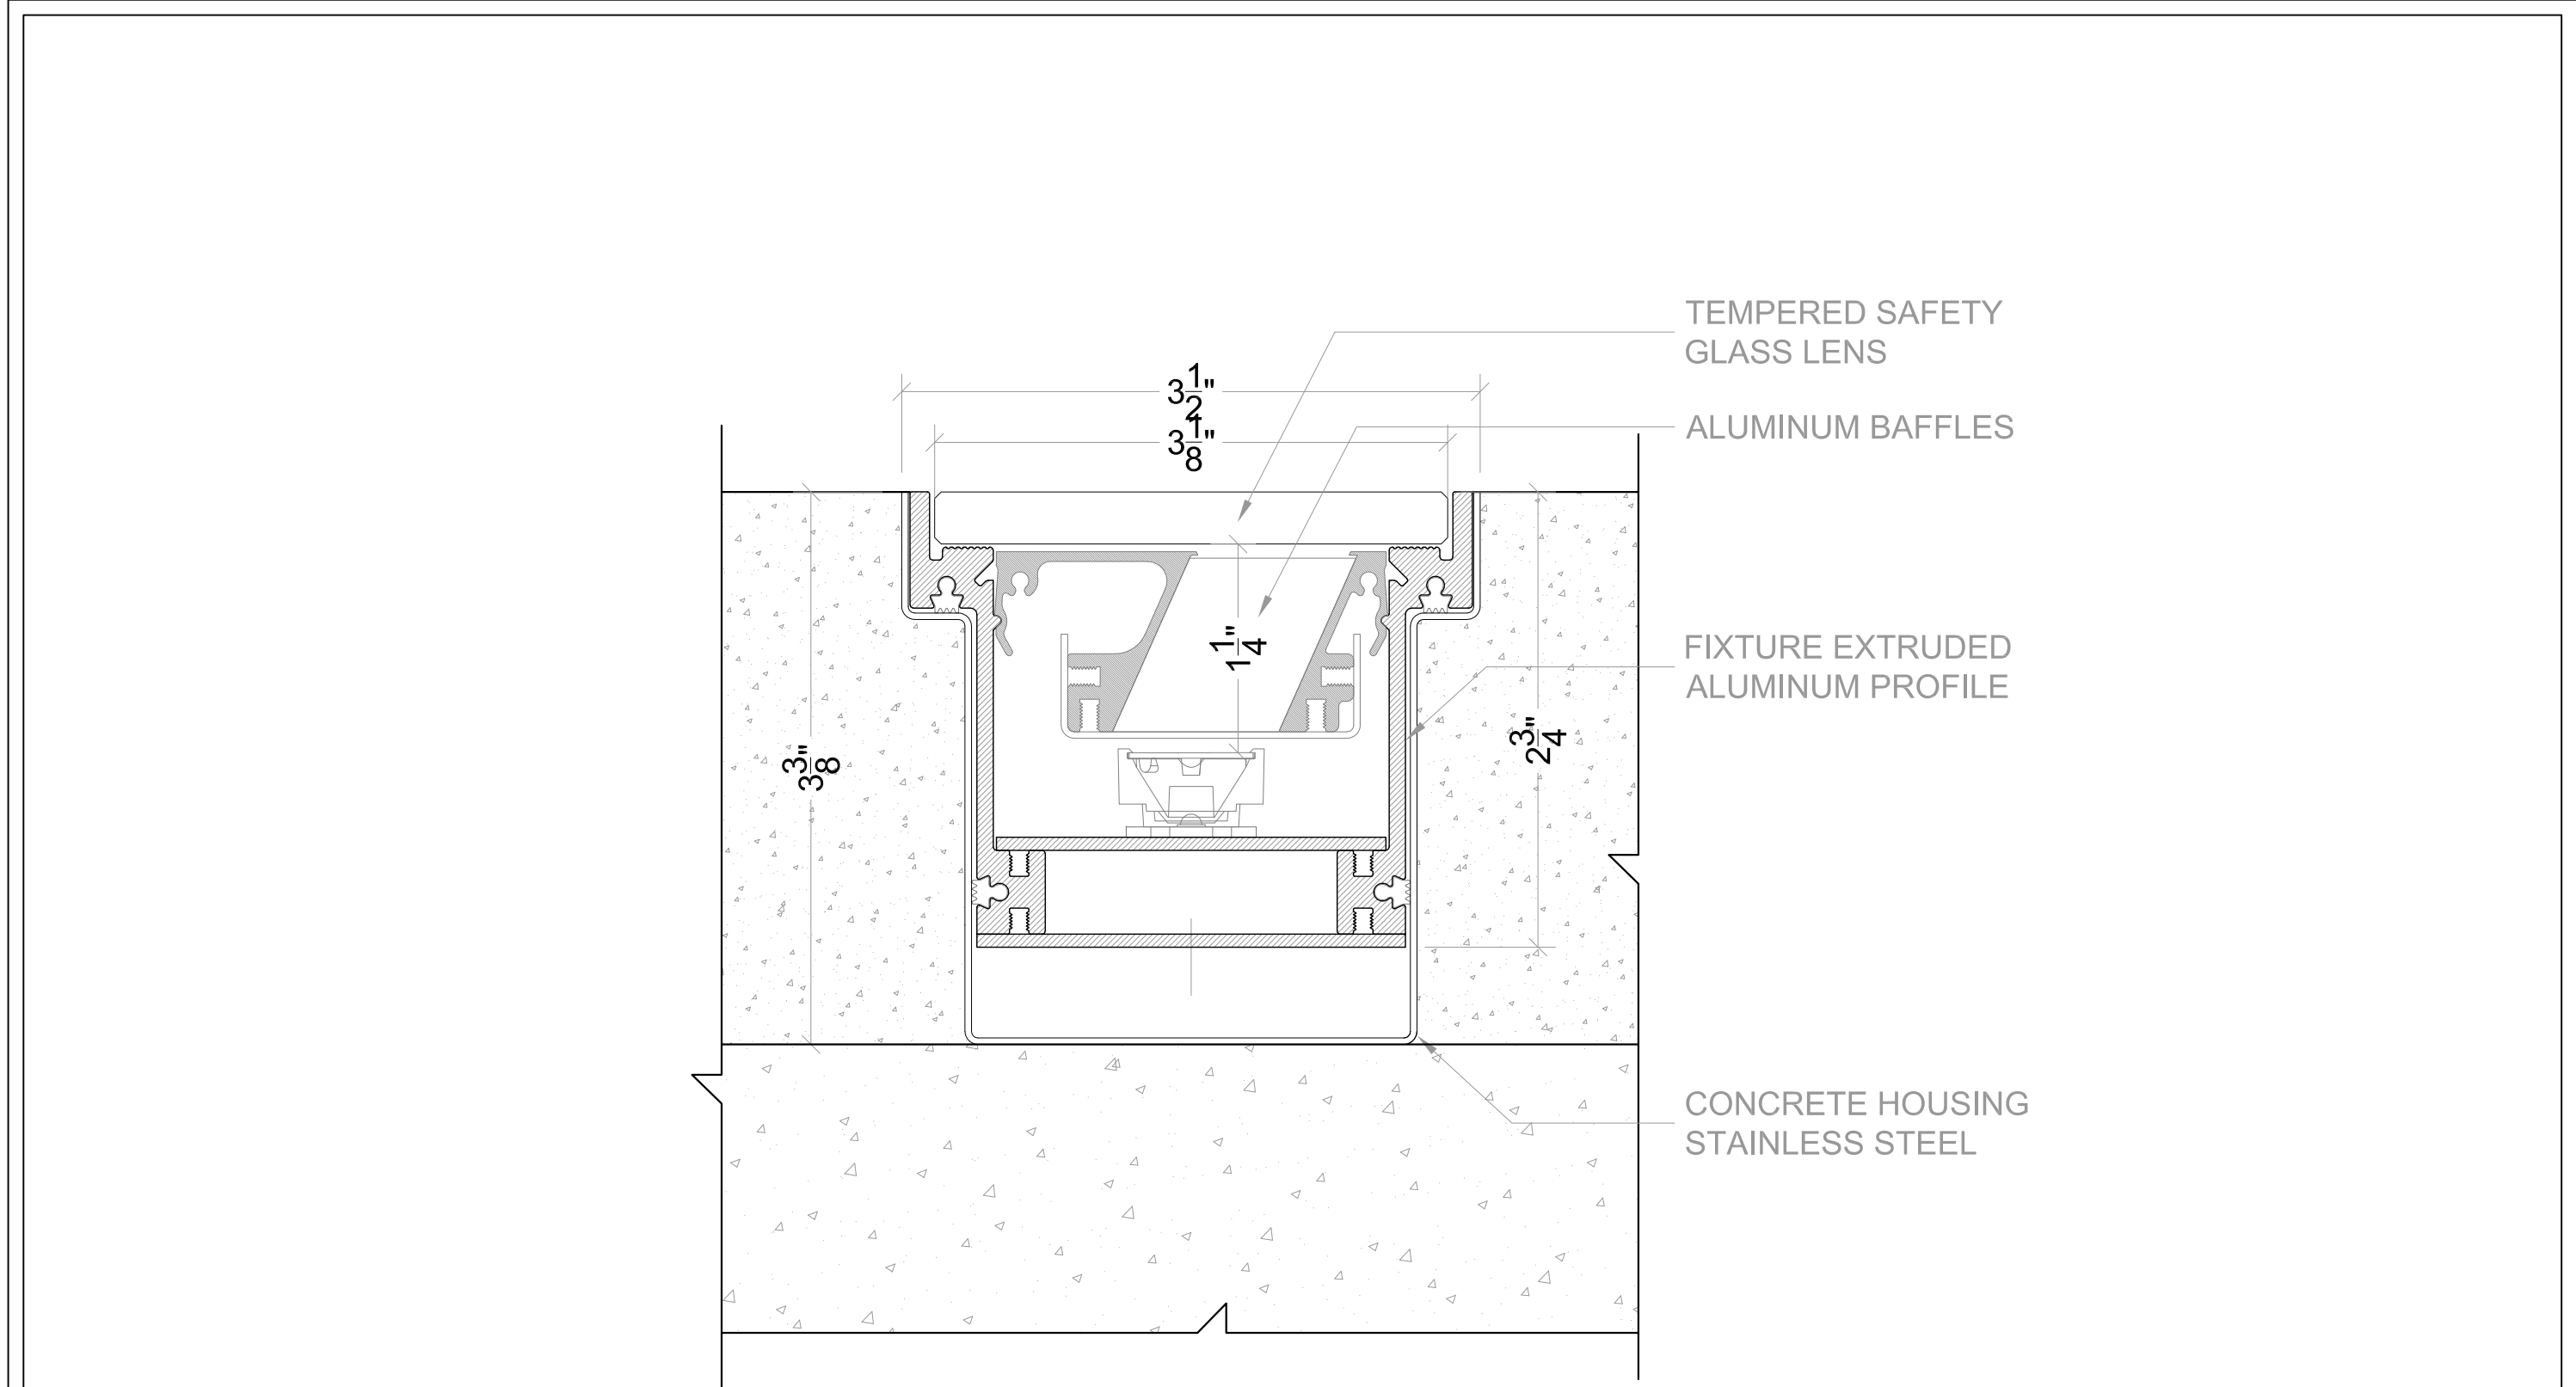

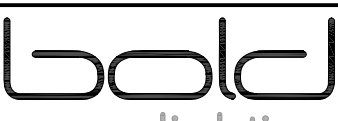	Product Name: U6 INGROUND	DRAWING TITLE  DETAILED SECTION	Product Designation: U6 inground	Mounting: Flooring	Project: 10905 CHALON Residence	Drawn By: G.M.	A3
	Catalog Reference: U6-ISS-XX-XX-XXX		Optics: WALLGRAZE	Color: Black	Client: Premier LED Lighting	Date: 07-08-2020	
					Revision: 00		
Notes: Modified Super Shallow Remote Driver Inground Grazer			Body Material: EXTRUDED ALUMINUM	IP Rating: IP67	File Name: Super Shallow Grazer		Scale: 1/1