
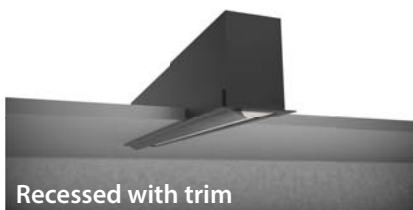


LIGHTWAY - KICK REFLECTOR

Product Code													
L6	I			00							I		
Series	Environment	Mounting	Optic	Beam	CCT	Output	Control Gear	IP	Emergency	Body finish	Layout	Length	Wiring
L6	I	SM RW RT PD	WK	00	827 830 840 927 930 8WD 9TW	L1 L2 L3 L4 L5 T1 T2 T3	P Q R S T	40 55	N	BS BT WS WT GS XX	I	12 24 36 48 60 C00	I B M E

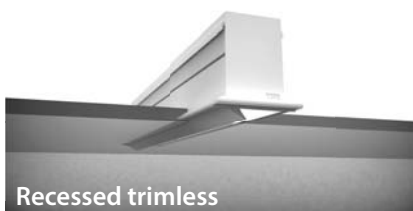

The U060 Lightway Kick reflector provides a smooth distribution of light over vertical surfaces. Its reflector helps reduce the aperture apparent size, therefore its surface luminance. The aluminum reflector with an integrated diffuser is specially designed to reduce glare and increase illuminance levels while providing a uniform light distribution. This luminaire has the ability to be supplied as an individual unit or as part of a continuous run.

Mounting

- SM:** Surface mounted
- RW:** Recessed with Trim
- RT:** Recessed Trimless
- PD:** Pendant Direct

Optic

- WK:** Kick-reflector Washer

Beam

- 00:** No Beam Angle

CCT

- 827:** 2700K, CRI +80
- 830:** 3000K, CRI +80
- 835:** 3500K, CRI +80
- 840:** 4000K, CRI +80
- 927:** 2700K, CRI +90
- 930:** 3000K, CRI +90
- 8WD:** 1800K - 2780K
- 9TW:** 2200K - 5000K

Output (Delivered, 3,000K CRI +80)

- L1:** 3W/ft, 275 lm / ft.
- L2:** 5W/ft, 381 lm / ft.
- L3:** 7W/ft, 534 lm / ft.
- L4:** 9W/ft, 747 lm / ft.
- L5:** 13W/ft, 1052 lm / ft.
- T1:** 2x3W/ft,
- T2:** 2x5W/ft,
- T3:** 2x7W/ft,

Control gear

- P:** NON DIM / ECG
- Q:** 0 TO 10 DIM
- R:*** DALI
- S:*** 2 Wires Phase Dimming
- P:*** DMX

*This driver option is only available integral for fixtures 24" and longer

IP

- 40:** IP40
- 55:** IP55

Body finish

- BS:** Black Smooth
- BT:** Black Textured
- WS:** White Smooth
- WT:** White Textured
- GS:** Grey Smooth
- XX:** Custom RAL Color

Emergency

- N:** No emergency

Layout

- I:** I shape

Length *

- 12:** 12"
 - 24:** 23^{3/4}"
 - 36:** 35"
 - 48:** 46^{1/2}"
 - 60:** 58^{1/8}"
 - C00:** Custom
- For custom length, please note length in Inches

*These are rounded values, please refer to installation manual for exact dimensions.

Wiring


- I:** Individual
- B:** Beginning
- M:** Middle
- E:** End

We reserve the right to make technical changes without prior notice.



LIGHTWAY - KICK REFLECTOR




2D DIMENSIONAL DIAGRAMS

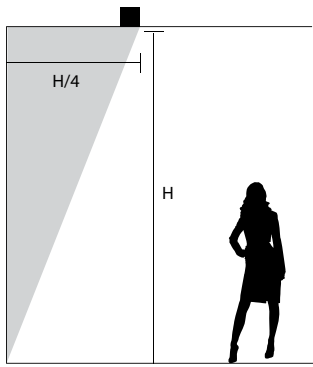


Optimal set back from wall is H/4 where H is the wall height.

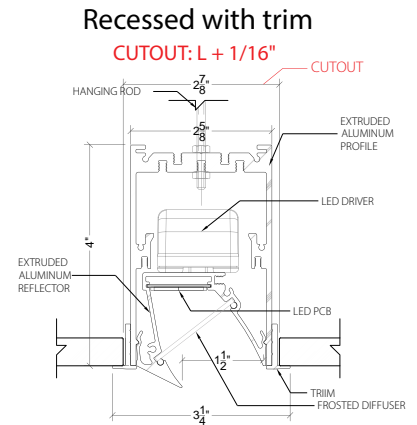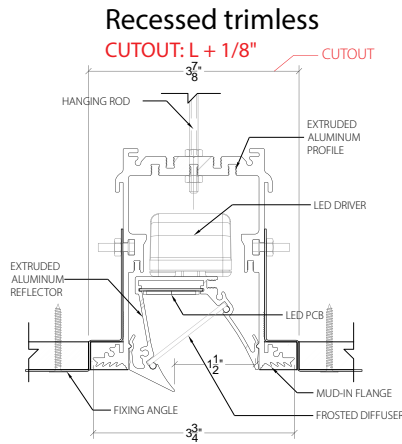


Ceiling mounted



Pendant

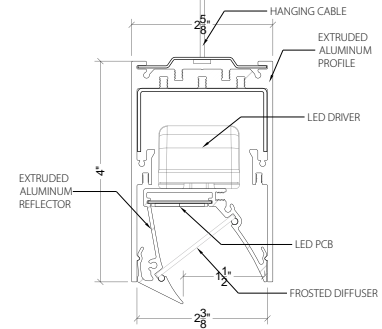

PHOTOMETRIC DATA

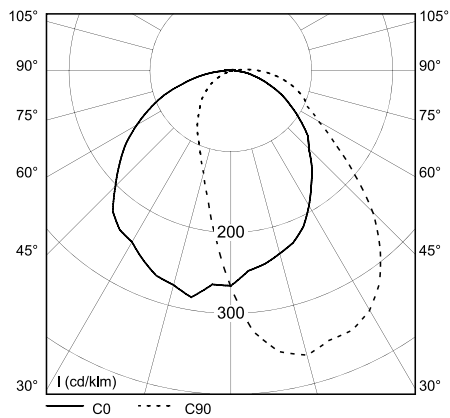

Lumen output

		CRI 80				
		2200K	2700K	3000K	4000 K	5000 K
L1	3 W/ft		259 Lm/ft	275 Lm/ft	275 Lm/ft	
L2	5 W/ft		366 Lm/ft	381 Lm/ft	397 Lm/ft	
L3	7 W/ft		503 Lm/ft	534 Lm/ft	549 Lm/ft	
L4	9 W/ft		717 Lm/ft	747 Lm/ft	778 Lm/ft	
L5	13 W/ft		1007 Lm/ft	1052 Lm/ft	1098 Lm/ft	
T1	3 W/ft	244 Lm/ft				290 Lm/ft
T2	5 W/ft	336 Lm/ft				427 Lm/ft
T3	7 W/ft	488 Lm/ft				580 Lm/ft

ELECTRICAL

120 - 277 V ; 50 - 60 Hz

Phase DIM



1 To 10V DIM / DALI DIM

