

QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

 hameleon

THE ART OF ADAPTATION



bold



# Shipping **within 2 weeks.**

---

## Up to **200 downlights** per order.

Our Quick ship program offers a reliable on-time delivery to align with the most demanding of project schedules. Every order is produced in accordance with your requirements from our expansive offering of options and **ships within 2 weeks.**

### INSTRUCTIONS

Use provided Excel file to configure exact specification and price.

Place orders through [orders@boldlighting.com](mailto:orders@boldlighting.com).

Include "Quick Ship" in the subject line.

Reach out to your Bold Sales Representative with any questions.

### TERMS & CONDITIONS

- Delivery within 10 business days from sales order confirmation.
- Shipping dates are estimated and do not include weekends or holidays.
- 10 day delivery applies to products from the quick ship program only.
- 10 day delivery applies to orders up to 200 units or less.
- A small order fee of \$200 will apply to orders of less than 25 units.
- Order must be paid in full prior to shipment. Delay in payment will result in longer delivery times.
- Returns and exchanges not accepted for quick ship program.
- All quick ship orders subject to availability.

# ASPECT RATIO

**CHAMELEON 3"**  
9-13W / 1016-1422lm





**CHAMELEON 4"**  
10-18W / 1108-1681lm

**3" SQUARE**  
(2x)3-7/16"

**3" ROUND**  
Ø3-7/16"

**4" SQUARE**  
(2x)4-3/16"

**4" ROUND**  
Ø4-3/16"



**FIXED  
& WALWASHER**

DOWNLIGHT HEIGHT  
CHAMELEON 3 IN.: 3-3/4"  
CHAMELEON 4 IN.: 4"

**ADJUSTABLE  
& ZOOMABLE**

DOWNLIGHT HEIGHT  
CHAMELEON 3 IN.: 4-1/8"  
CHAMELEON 4 IN.: 5"

**SHALLOW**

DOWNLIGHT HEIGHT  
SHALLOW 3 IN.: 2-3/4"



↑ ↓ **CEILING THICKNESS**  
MIN: 1/8" - MAX: 4"


# OPTICAL PRECISION

## ENDLESS POSSIBILITIES


FIXED DOWNLIGHT




WALLWASHERS

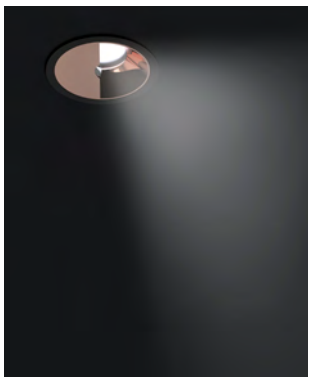

ADJUSTABLE ACCENT

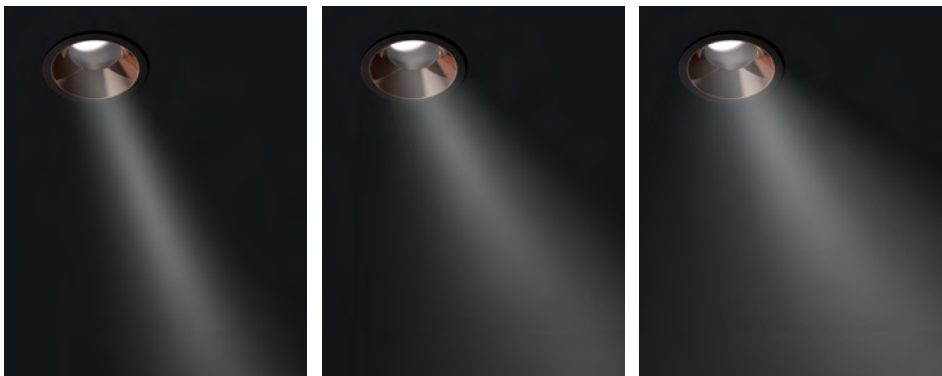

ZOOMABLE 15°-50°

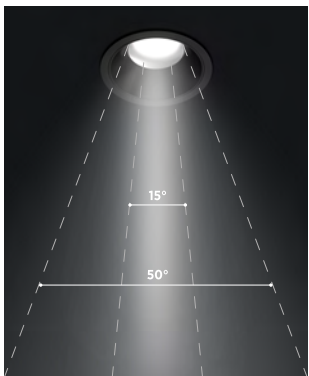


## OPTICAL ACCESSORIES




ELLIPTICAL LENS | SOLITE LENS | DIFFUSE LENS | BEAM SHAPING LENS | HONEYCOMB


## REFLECTOR FINISHES

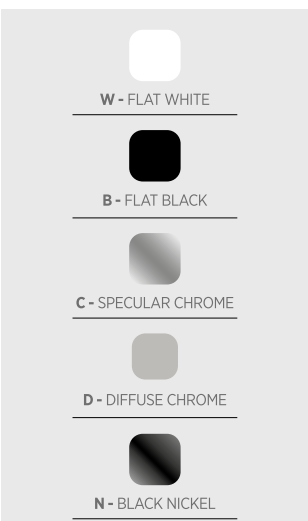



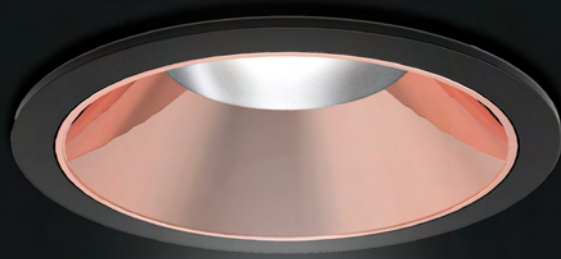

— 3" (75mm) —



 **hameleon 3"**

Specsheets

QUICK SHIP

SHIPS  
WITHIN  
2  
WEEKS

# Chameleon

R3" QUIETLY ADJUSTABLE




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Gear driven tilt 0° to 30° and 360° lockable rotation
- 5 years limited warranty
- Wide range of trims and reflector finishes

Code example: **C3-A**R1W-LU2-RWD-S927-E

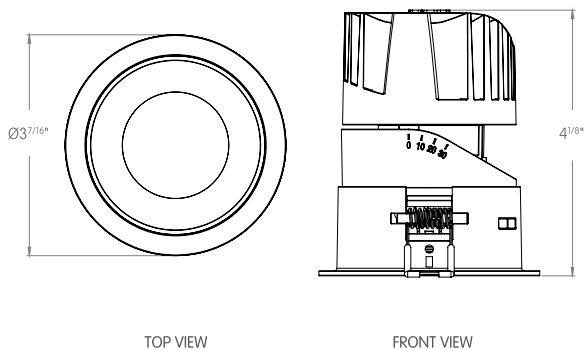

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C3-A</b>	<b>R1</b> Round Trim	<b>W</b> White	<b>L</b> 9W (1016lm)	<b>U</b> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>RO</b> Round Trimless		<b>M</b> 11W (1219lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
			<b>H</b> 13W (1422lm)		<b>2</b> 0-10 fade-off <b>P</b> Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>S</b> 12°	<b>9</b> 90	<b>27</b> 2700K	<b>C</b> Clear Lens
<b>N</b> Non-IC	<b>B</b> Flat Black	<b>W</b> Wet	<b>F</b> 36°		<b>30</b> 3000K	<b>D</b> <sup>3</sup> Diffuse lens
<b>P</b> IC	<b>C</b> Specular Chrome		<b>M</b> 24°		<b>WD</b> 3000K - 1800K	<b>E</b> <sup>4</sup> Elliptical Lens
<b>A</b> <sup>2</sup> Airtight						<b>S</b> Solite Lens

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lens adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon

R3" QUIETLY FIXED




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,390lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Wide Range of optical options
- 5 years limited warranty
- Wide range of trims and reflectors finishes

\* Downlight is inherently IC rated per ETL testing to UL1598 standard and can be installed without a housing when specified with Standard Output (11 Watts). LED driver current is factory set at 260mA.

Code example: **C3-F**R1W-LU2-RWD-S927-E

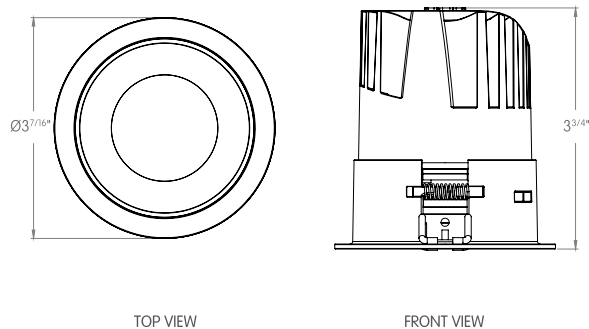

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C3-F</b>	<b>R1</b> Round Trim	<b>W</b> White	<b>L</b> 9W (993lm)	<b>U</b> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>R0</b> Round Trimless	<b>B</b> Black	<b>M</b> 11W (1191lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
		<b>S</b> Grey	<b>H</b> 13W (1390lm)		<b>2</b> 0-10 fade-off
					<b>P</b> Phase ELV & Triac

Housing		Ref. Color		IP Rating		Optics Type		LED CRI		LED CCT		Accessories	
R	Remodel	W	Flat White	D	Dry	S	12°	9	90	27	2700K	C	Clear Lens
N	Non-IC	B	Flat Black	W	Wet	M	24°			30	3000K	D <sup>3</sup>	Diffuse lens
P <sup>2</sup>	IC	C	Specular Chrome			F	36°			WD	3000K - 1800K	E <sup>4</sup>	Elliptical Lens
A <sup>2</sup>	Airtight	D	Diffuse Chrome									S	Solite Lens

## Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lens adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
2  
WEEKS


# Chameleon

R3" QUIETLY WASHED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects. The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 889lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- High uniformity light distribution Emin./ Emax.= 1/3
- 5 years limited warranty
- Wide range of trims and reflectors finishes

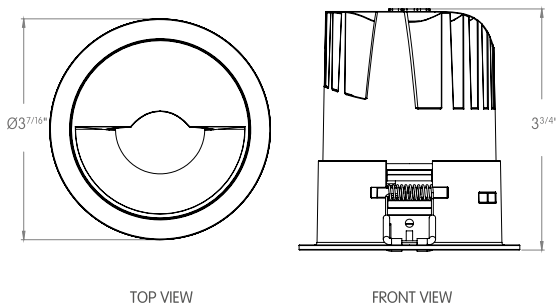

Code example: **C3-W** R1W - LU2 - RWD - M927

Series	Mounting	Trim Color	Output	Voltage
<b>C3-W</b>	<b>R1</b> Round Trim	<b>W</b> White	<b>L</b> 9W (635lm)	<b>U</b> <sup>1</sup> Universal 120V to 277V
	<b>R0</b> Round Trimless	<b>B</b> Black	<b>M</b> 11W (762lm)	<b>1</b> 120V
		<b>S</b> Grey	<b>H</b> 13W (889lm)	

Control	Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT
<b>0</b> Non-Dim	<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>M</b> 24°	<b>9</b> 90	<b>27</b> 2700K
<b>1</b> 0-10 to 1%	<b>N</b> Non-IC		<b>W</b> Wet			<b>30</b> 3000K
<b>2</b> 0-10 fade-off	<b>P</b> IC					<b>WD</b> 3000K - 1800K
<b>P</b> Phase ELV & Triac	<b>A</b> <sup>2</sup> Airtight					

Notes:

<sup>1</sup> Not applicable for ELV dimming.  
<sup>2</sup> Chicago Plenum rated.

Consult factory for lead-times.  
Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon


R3" QUIETLY ZOOMABLE



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects. The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,212lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Gear driven tilt 0° to 30° and 360° lockable rotation
- Zoomable Lens from 15° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-Z**R1W-LU2-RWD-Z927-H

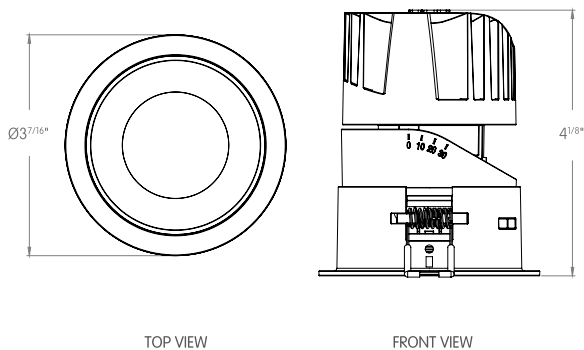

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C3-Z</b>	<b>R1</b> Round Trim	<b>W</b> White	<b>L</b> 9W (901lm)	<b>U</b> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>R0</b> Round Trimless		<b>M</b> 11W (1030lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
			<b>H</b> 13W (1212lm)		<b>2</b> 0-10 fade-off <b>P</b> Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>Z</b> 15°-50°	<b>9</b> 90	<b>27</b> 2700K	<b>C</b> Clear Lens
<b>N</b> Non-IC	<b>B</b> Flat Black	<b>W</b> Wet			<b>30</b> 3000K	<b>D</b> <sup>3</sup> Diffuse lens
<b>P</b> <sup>2</sup> IC	<b>C</b> Specular Chrome				<b>WD</b> 3000K - 1800K	<b>E</b> <sup>4</sup> Elliptical Lens
<b>A</b> <sup>2</sup> Airtight						<b>S</b> Solite Lens
						<b>H</b> Honeycomb

Notes:

- <sup>1</sup> Not applicable for ELV dimming.  
<sup>2</sup> Chicago Plenum rated.  
<sup>3</sup> Diffuse lense adds 15° beam angle.  
<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.  
 Bold Lighting reserves the right to make technical changes without notice.





QUICK SHIP

SHIPS  
WITHIN  
2  
WEEKS

# Chameleon

S3" QUIETLY ADJUSTABLE




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,422lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Gear driven tilt 0° to 30° and 360° lockable rotation
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-A** S1W-LU2-RWD-S927-H

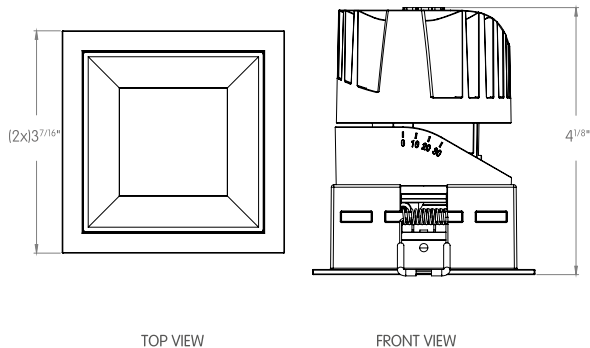

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C3-A</b>	<b>S1</b> Square Trim	<b>W</b> White	<b>L</b> 9W (1016lm)	<b>U</b> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>S0</b> Square Trimless	<b>B</b> Black	<b>M</b> 11W (1219lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
		<b>S</b> Grey	<b>H</b> 13W (1422lm)		<b>2</b> 0-10 fade-off
					<b>P</b> Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>S</b> 12°	<b>9</b> 90	<b>27</b> 2700K	<b>C</b> Clear Lens
<b>N</b> Non-IC	<b>B</b> Flat Black	<b>W</b> Wet	<b>M</b> 24°		<b>30</b> 3000K	<b>D</b> <sup>3</sup> Diffuse lens
<b>P</b> IC	<b>C</b> Specular Chrome		<b>F</b> 36°		<b>WD</b> 3000K - 1800K	<b>E</b> <sup>4</sup> Elliptical Lens
<b>A</b> <sup>2</sup> Airtight						<b>S</b> Solite Lens
						<b>H</b> Honeycomb

#### Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lens adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon


S3" QUIETLY FIXED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,390lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Wide Range of optical options
- 5 years limited warranty
- Wide range of trims and reflectors finishes

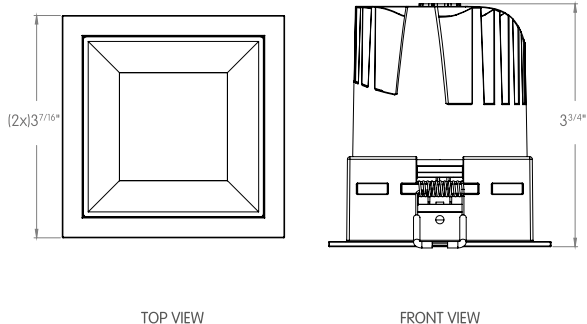

Code example: **C3-F**S1W-LU2-RWD-S927-E

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C3-F</b>	<b>S1</b> Square Trim	<b>W</b> White	<b>L</b> 9W (993lm)	<b>U</b> <sup>1</sup> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>S0</b> Square Trimless	<b>B</b> Black	<b>M</b> 11W (1191lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
		<b>S</b> Grey	<b>H</b> 13W (1390lm)		<b>2</b> 0-10 fade-off
					<b>P</b> Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>S</b> 12°	<b>9</b> 90	<b>27</b> 2700K	<b>C</b> Clear Lens
<b>N</b> Non-IC	<b>B</b> Flat Black	<b>W</b> Wet	<b>M</b> 24°		<b>30</b> 3000K	<b>D</b> <sup>3</sup> Diffuse lens
<b>P</b> IC	<b>C</b> Specular Chrome		<b>F</b> 36°		<b>WD</b> 3000K - 1800K	<b>E</b> <sup>4</sup> Elliptical Lens
<b>A</b> <sup>2</sup> Airtight	<b>D</b> Diffuse Chrome					<b>S</b> Solite Lens

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lense adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
2  
WEEKS

# Chameleon

S3" QUIETLY WASHED




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 889lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- High uniformity light distribution Emin./ Emax.= 1/3
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-W** S1W-LU2-RWD-M927

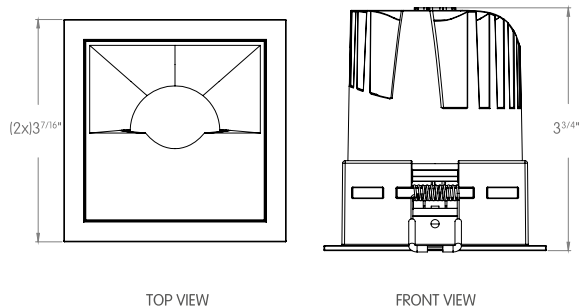

Series	Mounting	Trim Color	Output	Voltage
<b>C3-W</b>	<b>S1</b> Square Trim	<b>W</b> White	<b>L</b> 9W (635lm)	<b>U</b> <sup>1</sup> Universal 120V to 277V
	<b>S0</b> Square Trimless	<b>B</b> Black	<b>M</b> 11W (762lm)	<b>1</b> 120V
		<b>S</b> Grey	<b>H</b> 13W (889lm)	

Control	Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT
<b>0</b> Non-Dim	<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>M</b> 24°	<b>9</b> 90	<b>27</b> 2700K
<b>1</b> 0-10 to 1%	<b>N</b> Non-IC		<b>W</b> Wet			<b>30</b> 3000K
<b>2</b> 0-10 fade-off	<b>P</b> <sup>2</sup> IC					<b>WD</b> 3000K - 1800K
<b>P</b> Phase ELV & Triac	<b>A</b> <sup>2</sup> Airtight					

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon

S3" QUIETLY ZOOMABLE




Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S3 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,212lm delivered output
- Trim and trimless mounting options
- Dim-to-Warm capability 3000K to 1800K
- Gear driven tilt 0° to 30° and 360° lockable rotation
- Zoomable Lens from 15° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

Code example: **C3-Z** S1W-LU2-RWD-Z927-H

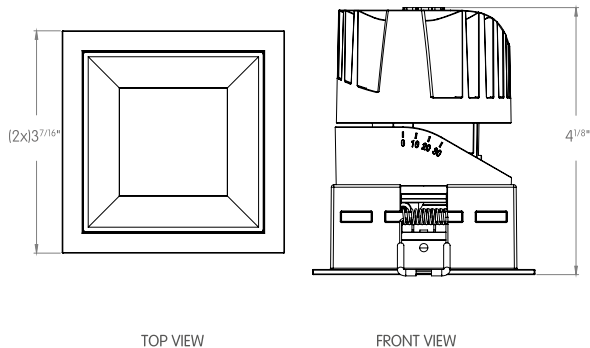

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C3-Z</b>	<b>S1</b> Square Trim	<b>W</b> White	<b>L</b> 9W (901lm)	<b>U<sup>1</sup></b> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>S0</b> Square Trimless	<b>B</b> Black	<b>M</b> 11W (1030lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
		<b>S</b> Grey	<b>H</b> 13W (1212lm)		<b>2</b> 0-10 fade-off
					<b>P</b> Phase ELV & Triac

Housing		Ref. Color		IP Rating		Optics Type		LED CRI		LED CCT		Accessories	
R	Remodel	W	Flat White	D	Dry	Z	15° - 50°	9	90	27	2700K	C	Clear Lens
N	Non-IC	B	Flat Black	W	Wet					30	3000K	D <sup>3</sup>	Diffuse lens
P <sup>2</sup>	IC	C	Specular Chrome							WD	3000K - 1800K	E <sup>4</sup>	Elliptical Lens
A <sup>2</sup>	Airtight											S	Solite Lens
												H	Honeycomb

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lens adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.



Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.





4" (100mm)



 **hameleon 4"**

Specsheets



QUICK SHIP

SHIPS  
WITHIN  
2  
WEEKS

# Chameleon


R4" QUIETLY ADJUSTABLE



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,681lm delivered output
- Trim and trimless mounting options
- Gear driven tilt 0° to 35° and 360° lockable rotation
- Zoomable Lens from 10° to 50°
- 5 years limited warranty
- Wide range of trims and reflectors finishes

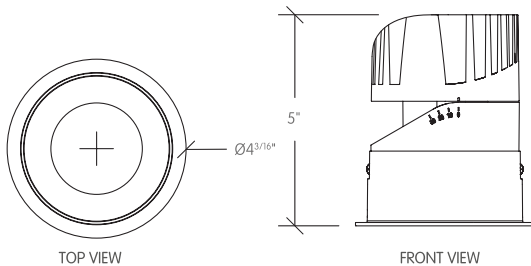

Code example: **C4-A**R1W-LU2-RWD-S927-H

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C4-A</b>	<b>R1</b> Round Trim	<b>W</b> White	<b>L</b> 10W (1108lm)	<b>U</b> <sup>1</sup> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>R0</b> Round Trimless	<b>S</b> Grey	<b>M</b> 12W (1345lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
			<b>H</b> 18W (1681lm)		<b>2</b> 0-10 fade-off
					<b>P</b> Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>S</b> 12°	<b>9</b> 90	<b>27</b> 2700K	<b>C</b> Clear Lens
<b>N</b> Non-IC	<b>B</b> Flat Black	<b>W</b> Wet	<b>M</b> 24°		<b>30</b> 3000K	<b>D</b> <sup>3</sup> Diffuse lens
<b>P</b> <sup>2</sup> IC	<b>D</b> Diffuse Chrome		<b>F</b> 36°			<b>E</b> <sup>4</sup> Elliptical Lens
<b>A</b> <sup>2</sup> Airtight	<b>N</b> Black Nickel					<b>S</b> Solite Lens
						<b>H</b> Honeycomb

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lens adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon


R4" QUIETLY FIXED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,681lm delivered output
- Trim and trimless mounting options
- Wide Range of optical options
- 5 years limited warranty
- Wide range of trims and reflectors finishes

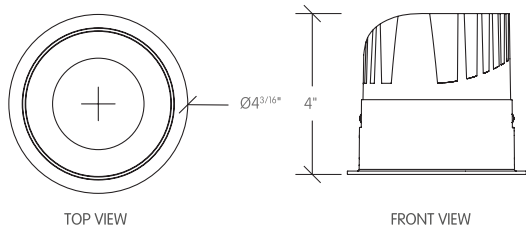

Code example: **C4-F**R1W-LU2-RWD-S927-H

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C4-F</b>	<b>R1</b> Round Trim	<b>W</b> White	<b>L</b> 10W (1108lm)	<b>U</b> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>RO</b> Round Trimless	<b>S</b> Grey	<b>M</b> 12W (1345lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
			<b>H</b> 18W (1681lm)		<b>2</b> 0-10 fade-off
					<b>P</b> Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>S</b> 12°	<b>9</b> 90	<b>27</b> 2700K	<b>C</b> Clear Lens
<b>N</b> Non-IC	<b>B</b> Flat Black	<b>W</b> Wet	<b>M</b> 24°		<b>30</b> 3000K	<b>D</b> <sup>3</sup> Diffuse lens
<b>P</b> IC	<b>D</b> Diffuse Chrome		<b>F</b> 36°			<b>E</b> <sup>4</sup> Elliptical Lens
<b>A</b> <sup>2</sup> Airtight	<b>N</b> Black Nickel					<b>S</b> Solite Lens
						<b>H</b> Honeycomb

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lens adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon


R4" QUIETLY WASHED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon R4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,681lm delivered output
- Trim and trimless mounting options
- High uniformity light distribution  $E_{min.}/E_{max.} = 1/3$
- 5 years limited warranty
- Wide range of trims and reflectors finishes

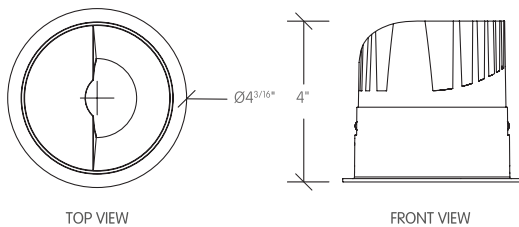

Code example: **C4-W**R1W-LU2-RWD-M927

Series	Mounting	Trim Color	Output	Voltage
<b>C4-W</b>	<b>R1</b> Round Trim	<b>W</b> White	<b>L</b> 10W (1108lm)	<b>U</b> Universal 120V to 277V
	<b>R0</b> Round Trimless	<b>B</b> Black	<b>M</b> 12W (1345lm)	<b>1</b> 120V
		<b>S</b> Grey	<b>H</b> 18W (1681lm)	

Control	Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT
<b>0</b> Non-Dim	<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>M</b> 24°	<b>9</b> 90	<b>27</b> 2700K
<b>1</b> 0-10 to 1%	<b>N</b> Non-IC	<b>D</b> Diffuse Chrome	<b>W</b> Wet			<b>30</b> 3000K
<b>2</b> 0-10 fade-off	<b>I</b> <sup>2</sup> IC					
<b>P</b> Phase ELV & Triac	<b>A</b> <sup>2</sup> Airtight					

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon


S4" QUIETLY ADJUSTABLE



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,681lm delivered output
- Trim and trimless mounting options
- Gear driven tilt 0° to 35° and 360° lockable rotation
- 5 years limited warranty
- Wide range of trims and reflectors finishes

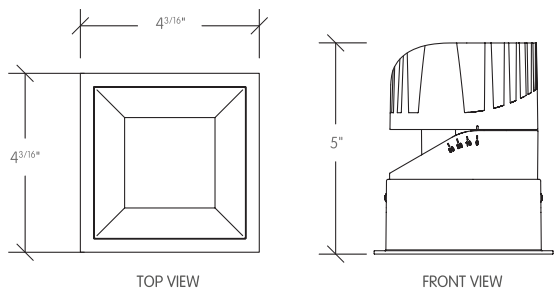

Code example: **C4-A**S1W-LU2-RWD-S927-E

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C4-A</b>	<b>S1</b> Square Trim	<b>W</b> White	<b>L</b> 10W (1108lm)	<b>U</b> <sup>1</sup> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>S0</b> Square Trimless	<b>S</b> Grey	<b>M</b> 12W (1345lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
			<b>H</b> 18W (1681lm)		<b>2</b> 0-10 fade-off <b>P</b> Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>S</b> 12°	<b>9</b> 90	<b>27</b> 2700K	<b>C</b> Clear Lens
<b>N</b> Non-IC	<b>D</b> Diffuse Chrome	<b>W</b> Wet	<b>M</b> 24°		<b>30</b> 3000K	<b>D</b> <sup>3</sup> Diffuse lens
<b>P</b> IC			<b>F</b> 36°			<b>E</b> <sup>4</sup> Elliptical Lens
<b>A</b> <sup>2</sup> Airtight						<b>S</b> Solite Lens

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lens adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon


S4" QUIETLY FIXED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,681lm delivered output
- Trim and trimless mounting options
- Wide Range of optical options
- 5 years limited warranty
- Wide range of trims and reflectors finishes

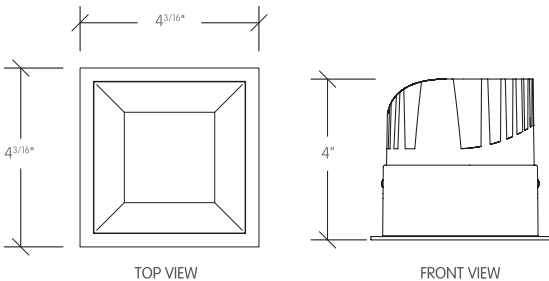

Code example: **C4-F**S1W-LU2-RWD-S927-E

Series	Mounting	Trim Color	Output	Voltage	Control
<b>C4-F</b>	<b>S1</b> Square Trim	<b>W</b> White	<b>L</b> 10W (1108lm)	<b>U</b> <sup>1</sup> Universal 120V to 277V	<b>0</b> Non-Dim
	<b>S0</b> Square Trimless	<b>S</b> Grey	<b>M</b> 12W (1345lm)	<b>1</b> 120V	<b>1</b> 0-10 to 1%
			<b>H</b> 18W (1681lm)		<b>2</b> 0-10 fade-off <b>P</b> Phase ELV & Triac

Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT	Accessories
<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>S</b> 12°	<b>9</b> 90	<b>27</b> 2700K	<b>C</b> Clear Lens
<b>N</b> Non-IC	<b>D</b> Diffuse Chrome		<b>M</b> 24°		<b>30</b> 3000K	<b>D</b> <sup>3</sup> Diffuse lens
<b>I</b> <sup>2</sup> IC			<b>F</b> 36°			<b>E</b> <sup>4</sup> Elliptical Lens
<b>A</b> <sup>2</sup> Airtight						<b>S</b> Solite Lens

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

<sup>3</sup> Diffuse lens adds 15° beam angle.

<sup>4</sup> Elliptical lenses 30°x60°.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.





QUICK SHIP

SHIPS  
WITHIN  
**2**  
WEEKS

# Chameleon


S4" QUIETLY WASHED



Spec-grade performance LED downlights. Optimal for hospitality, commercial, high-end residential and corporate projects.

The Chameleon S4 downlights offer a high output, precise optics, a wide range of mounting options, reflector finishes, and optical accessories.

- Up to 1,681lm delivered output
- Trim and trimless mounting options
- High uniformity light distribution  $E_{min.}/E_{max.} = 1/3$
- 5 years limited warranty
- Wide range of trims and reflectors finishes

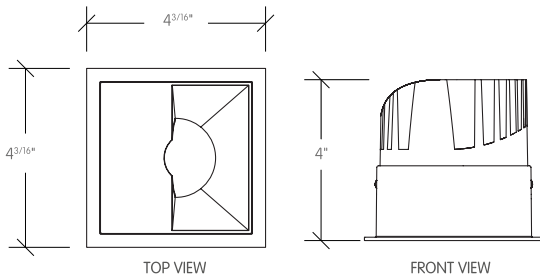

Code example: **C4-W** S1W-L10R-WW-M827-9-0

Series	Mounting	Trim Color	Output	Voltage
<b>C4-W</b>	<b>S1</b> Square Trim	<b>W</b> White	<b>L</b> 10W (1108lm)	<b>U</b> Universal 120V to 277V
	<b>S0</b> Square Trimless	<b>S</b> Grey	<b>M</b> 12W (1345lm)	<b>1</b> 120V
			<b>H</b> 18W (1681lm)	

Control	Housing	Ref. Color	IP Rating	Optics Type	LED CRI	LED CCT
<b>0</b> Non-Dim	<b>R</b> Remodel	<b>W</b> Flat White	<b>D</b> Dry	<b>M</b> 24°	<b>9</b> 90	<b>27</b> 2700K
<b>1</b> 0-10 to 1%	<b>N</b> Non-IC		<b>W</b> Wet			<b>30</b> 3000K
<b>2</b> 0-10 fade-off	<b>I</b> IC					
<b>P</b> Phase ELV & Triac	<b>A</b> Airtight					

Notes:

<sup>1</sup> Not applicable for ELV dimming.

<sup>2</sup> Chicago Plenum rated.

Consult factory for lead-times.

Bold Lighting reserves the right to make technical changes without notice.



**ORDER NOW THROUGH**  
[orders@boldlighting.com](mailto:orders@boldlighting.com)

**bold**

4710 Ecton Dr., Marietta, GA 30066, USA  
+1 678-903-4061 | [info@boldlighting.us](mailto:info@boldlighting.us)

[www.boldlighting.com](http://www.boldlighting.com)