BILLET OUTDOOR WALLWASHER

Pendant

Key Features:

- Wide asymmetric distribution.
- Uniform vertical illumination.
- Smooth gradient.
- 330 lm/ft to 1265 lm/ft.

Technical Data:

Body Material	Extruded Aluminum
Safety	Chicago Plenum
Warranty	3 Years
Light Source	High Power LEDs
Lifetime	L80/B10 @ 70,000 hours
Power Range	5W/ft to 20W/ft
Delivered Lumen Range	330 lm/ft to 1265 lm/ft
Dimensions	Refer to Dimensions Table
Driver	Integral / Constant Current
Code Compliance	CCEA / CSA / CE / ETL
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / Tunable White

Code:

Code Example: BOWP12WL1BWW9270

BOW	☐	☐☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Type	Mounting	Length	Body Finish	Power	Voltage	Control	Baffles Finish	Optics Type	CRI	CCT	Emergency
BOW	**P** Pendant	**24** 24 inch **36** 36 inch **48** 48 inch **60** 60 inch	**W** White **B** Black	Mono: **L** 5 W/ft - 375 lm/ft **M** 10 W/ft - 650 lm/ft **H** 15 W/ft - 915 lm/ft **V** 20 W/ft - 1180 lm/ft Tunable White: **U** 10 W/ft - 555 lm/ft **A** 20 W/ft - 1015 lm/ft	**1** 120V **U** Universal 120 to 277V	**A** Non-Dim **B** 0-10 to 1% **D** DALI to 1% **E** ELV	**W** Flat White **B** Flat Black	**W** Washer	**9** 90+	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **TW** 2700K - 5000K	**N** No

Notes:

1. Static and dim to warm outputs are at 3000K.
2. Run length: it is an increment of 1ft for lengths above 5ft with the combinations of the standard lengths.
3. RGBW only available with DMX dimming.
4. Athena Node compatibility available upon request.

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Optical Flexibility:

BAFFLED WALLWASHER

Wallwasher



Max. 1,924 cd 1,000 lm

Billet wallwash provides even illumination of vertical surfaces with a flexible setback of 1/8 to 1/6 of the wall height. This optic ia is ideal for washing large areas where exceptional uniformity is required.

Wallwasher Optimal Spacing

Plan View

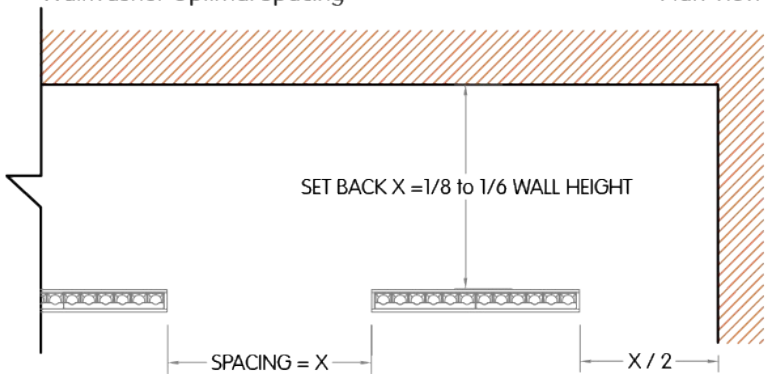

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Delivered Lumen Output:

Per Linear Foot

Output	Watts	CRI +90			
STATIC-WHITE		2700K	3000K	3500K	4000K
L	5W	330 lm	375 lm	355 lm	360 lm
M	10W	615 lm	650 lm	665 lm	675 lm
H	15W	895 lm	915 lm	965 lm	985 lm
V	20W	1150 lm	1180 lm	1240 lm	1265 lm

TUNABLE WHITE 2700K-5000K		2700K	5000K
U	10W	555 lm	555 lm
A	20W	1015 lm	1015 lm

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Mounting Flexibility:

PENDANT



Actual (inch)
L= 24 1/2" | 36 5/16" | 48 1/8" | 59 15/16" | Continuous runs
W= 2 13/16"
H= 3 9/16"
X= 59"



Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us