BILLET OUTDOOR WALLWASHER

Pendant

Key Features:

- Wide asymmetric distribution.
- Uniform vertical illumination.
- Smooth gradient.
- 1083 lm/m to 4150 lm/m.

IP65

Technical Data:

Body Material	Extruded Aluminum
Safety	Chicago Plenum
Warranty	3 Years
Light Source	High Power LEDs
Lifetime	L80/B10 @ 70,000 hours
Power Range	16W/m to 66W/m
Delivered Lumen Range	1083 lm/m to 4150 lm/m
Dimensions	Refer to Dimensions Table
Driver	Integral / Constant Current
Code Compliance	CCEA / CSA / CE / ETL
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / Tunable White

Code:

Code Example: BOWP12WL2BWW9270

BOW	☐	☐☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Type	Mounting	Length	Body Finish	Power	Voltage	Control	Baffles Finish	Optics Type	CRI	CCT	Emergency
BOW	**P** Pendant	**24** 600 mm **36** 900 mm **48** 1200 mm **60** 1500 mm	**W** White **B** Black	Mono: **L** 16 W/m - 1230 lm/m **M** 33 W/m - 2133 lm/m **H** 49 W/m - 3002 lm/m **V** 66 W/m - 3871 lm/m Tunable White: **U** 33 W/m - 1821 lm/m **A** 66 W/m - 3330 lm/m	**2** 240-220V	**A** Non-Dim **B** 0-10 to 1% **D** DALI to 1% **E** ELV	**W** Flat White **B** Flat Black	**W** Washer	**9** 90+	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **TW** 2700K - 5000K	**N** No

Notes:

1. Static and dim to warm outputs are at 3000K.
2. Run length: it is an increment of 1ft for lengths above 5ft with the combinations of the standard lengths.
3. RGBW only available with DMX dimming.
4. Athena Node compatibility available upon request.

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Optical Flexibility:

BAFFLED WALLWASHER

Wallwasher



Max. 1,924 cd 1,000 lm

Billet wallwash provides even illumination of vertical surfaces with a flexible setback of 1/8 to 1/6 of the wall height. This optic ia is ideal for washing large areas where exceptional uniformity is required.

Wallwasher Optimal Spacing

Plan View

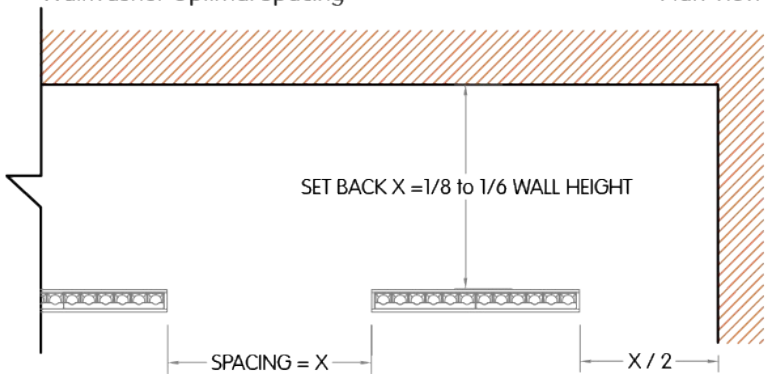

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Delivered Lumen Output:

Per Millimeter

Output	Watts	CRI +90			
STATIC-WHITE		**2700K**	**3000K**	**3500K**	**4000K**
L	**16W**	1083 lm	1230 lm	1165 lm	1181 lm
M	**33W**	2018 lm	2133 lm	2182 lm	2215 lm
H	**49W**	2936 lm	3002 lm	3166 lm	3232 lm
V	**66W**	3773 lm	3871 lm	4068 lm	4150 lm

TUNABLE WHITE 2700K-5000K		**2700K**	**5000K**
U	**33W**	1821 lm	1821 lm
A	**66W**	3330 lm	3330 lm

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Mounting Flexibility:

PENDANT



Actual (mm)
L= 622 | 922 | 1222 | 1522 | Continuous runs
W= 72
H= 91
X= 1500



Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us