BILLET OUTDOOR WALLGRAZER

Pendant

Key Features:

- Tight vertical beam.
- High contrast illumination.
- Texture enhancement.
- 385 lm/ft to 1485 lm/ft.

Technical Data:

Body Material	Extruded Aluminum
Safety	Chicago Plenum
Warranty	3 Years
Light Source	High Power LEDs
Lifetime	L80/B10 @ 70,000 hours
Power Range	5W/ft to 20W/ft
Delivered Lumen Range	385 lm/ft to 1485 lm/ft
Dimensions	Refer to Dimensions Table
Driver	Integral / Constant Current
Code Compliance	CCEA / CSA / CE / ETL
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / Tunable White

Code:

Code Example: BOWP12WL1BWG9270

BOW											
Type	Mounting	Length	Body Finish	Power	Voltage	Control	Baffles Finish	Optics Type	CRI	CCT	Emergency
BOW	**P** Pendant	**24** 24 inch **36** 36 inch **48** 48 inch **60** 60 inch	**W** White **B** Black	Mono: **L** 5 W/ft - 440 lm/ft **M** 10 W/ft - 765 lm/ft **H** 15 W/ft - 1075 lm/ft **V** 20 W/ft - 1390 lm/ft Tunable White: **U** 10 W/ft - 650 lm/ft **A** 20 W/ft - 1195 lm/ft	**1** 120V **U** Universal 120 to 277V	**A** Non-Dim **B** 0-10 to 1% **D** DALI to 1% **E** ELV	**W** Flat White **B** Flat Black	**G** Grazer	**9** 90+	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **TW** 2700K - 5000K	**N** No

Notes:

1. Static and dim to warm outputs are at 3000K.
2. Run length: it is an increment of 1ft for lengths above 5ft with the combinations of the standard lengths.
3. RGBW only available with DMX dimming.
4. Athena Node compatibility available upon request.

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Optical Flexibility:

BAFFLED WALLGRAZER

15° Wallgrazer



Max. 6,794 cd 1,000 lm

Billet wallgrazer delivers maximum performance for emphasizing textured and rough vertical surfaces. The standard output illuminates walls up to 14'-0" with outstanding transversal and longitudinal glare control.

Wallgrazer Optimal Spacing

Plan View

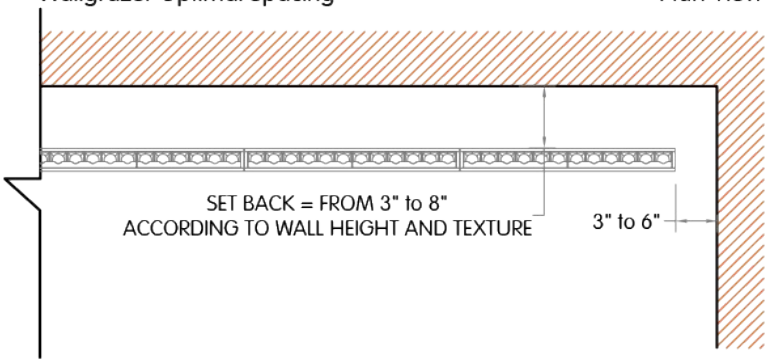

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Delivered Lumen Output:

Per Linear Foot

Output	Watts	CRI +90			
STATIC-WHITE		2700K	3000K	3500K	4000K
L	5W	385 lm	440 lm	420 lm	425 lm
M	10W	725 lm	765 lm	780 lm	795 lm
H	15W	1050 lm	1075 lm	1135 lm	1160 lm
V	20W	1350 lm	1390 lm	1460 lm	1485 lm

TUNABLE WHITE 2700K-5000K		2700K	5000K
U	10W	650 lm	650 lm
A	20W	1195 lm	1195 lm

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Mounting Flexibility:

PENDANT



Actual (inch)
L= 24 1/2" | 36 5/16" | 48 1/8" | 59 15/16" | Continuous runs
W= 2 13/16"
H= 3 5/8"
X= 3' 2 19/32"



Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us