BILLET OUTDOOR WALLGRAZER

Pendant

Key Features:

- Tight vertical beam.
- High contrast illumination.
- Texture enhancement.
- 1263 lm/m to 4872 lm/m.

3 YEARS IK10 IP65

Technical Data:

Body Material	Extruded Aluminum
Safety	Chicago Plenum
Warranty	3 Years
Light Source	High Power LEDs
Lifetime	L80/B10 @ 70,000 hours
Power Range	16W/m to 66W/m
Delivered Lumen Range	1263 lm/m to 4872 lm/m
Dimensions	Refer to Dimensions Table
Driver	Integral / Constant Current
Code Compliance	CCEA / CSA / CE / ETL
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / Tunable White

Code:

Code Example: BOWP12WL2BWG9270

BOW	☐	☐☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Type	Mounting	Length	Body Finish	Power	Voltage	Control	Baffles Finish	Optics Type	CRI	CCT	Emergency
BOW	**P** Pendant	**24** 600 mm **36** 900 mm **48** 1200 mm **60** 1500 mm	**W** White **B** Black	Mono: **L** 16 W/m - 1444 lm/m **M** 33 W/m - 2510 lm/m **H** 49 W/m - 3527 lm/m **V** 66 W/m - 4560 lm/m Tunable White: **U** 33 W/m - 2133 lm/m **A** 66 W/m - 3921 lm/m	**2** 240-220V	**A** Non-Dim **B** 0-10 to 1% **D** DALI to 1% **E** ELV	**W** Flat White **B** Flat Black	**G** Grazer	**9** 90+	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **TW** 2700K - 5000K	**N** No

Notes:

1. Static and dim to warm outputs are at 3000K.
2. Run length: it is an increment of 1ft for lengths above 5ft with the combinations of the standard lengths.
3. RGBW only available with DMX dimming.
4. Athena Node compatibility available upon request.

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Optical Flexibility:

BAFFLED WALLGRAZER

15° Wallgrazer



Max. 6,794 cd 1,000 lm

Billet wallgrazer delivers maximum performance for emphasizing textured and rough vertical surfaces. The standard output illuminates walls up to 355mm-0mm with outstanding transversal and longitudinal glare control.

Wallgrazer Optimal Spacing

Plan View

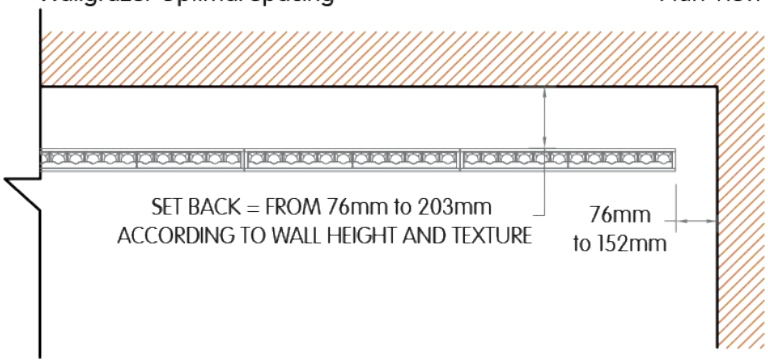

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Delivered Lumen Output:

Per Millimeter

Output	Watts	CRI +90			
STATIC-WHITE		**2700K**	**3000K**	**3500K**	**4000K**
L	**16W**	1263 lm	1444 lm	1378 lm	1394 lm
M	**33W**	2379 lm	2510 lm	2559 lm	2608 lm
H	**49W**	3445 lm	3527 lm	3724 lm	3806 lm
V	**66W**	4429 lm	4560 lm	4790 lm	4872 lm

TUNABLE WHITE 2700K-5000K		**2700K**	**5000K**
U	**33W**	2133 lm	2133 lm
A	**66W**	3921 lm	3921 lm

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Mounting Flexibility:

PENDANT



Actual (mm)
L= 622 | 922 | 1222 | 1522 | Continuous runs
W= 71.5
H= 90.5
X= 980



Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us