BILLET STEALTH WALLWASHER

Surface Mounted

Key Features:

- Indirect reflector.
- Zero direct glare.
- High uniformity.
- 690 lm/ft to 1440 lm/ft.

5 YEARS IP20

Technical Data:

Body Material	Extruded Aluminum	**Delivered Lumen Range**	690 lm/ft to 1440 lm/ft
Safety	Chicago Plenum	**Dimensions**	Refer to Dimensions Table
Warranty	5 Years	**Driver**	Integral / Constant Current
Light Source	Mid Power LEDs	**Code Compliance**	CCEA / CSA / CE / ETL
Lifetime	L80/B10 @ 70,000 hours	**CRI**	90+
Power Range	10W/ft to 20W/ft	**CCT**	2700K / 3000K / 3500K / 4000K

Code:

Code Example: BIKS12WH1BWW9270

BIK												
Type	Mounting	Length	Body Finish	Power	Voltage	Control	Baffles Finish	Optics Type	CRI	CCT	Emergency
BIK	**S** Surface Mounted	**24** 24 inch **36** 36 inch **48** 48 inch **60** 60 inch	**W** White **B** Black	Mono: **L** 5 W/ft - 631 lm/ft **M** 10 W/ft - 1287 lm/ft **H** 15 W/ft - 1940 lm/ft **V** 20 W/ft - 2614 lm/ft	**1** 120V **U** Universal 120 to 277V	**A** Non-Dim **B** 0-10 to 1% **D** DALI to 1% **E** ELV	**W** Flat White **B** Flat Black	**W** Washer	**9** 90+	**27** 2700K **30** 3000K **35** 3500K **40** 4000K	**N** No **9** 90 mins

Notes:

1. Static and dim to warm outputs are at 3000K.
2. Run length: it is an increment of 1ft for lengths above 5ft with the combinations of the standard lengths.
3. RGBW only available with DMX dimming.
4. Athena Node compatibility available upon request.

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Optical Flexibility:

STEALTH WALLWASHER

Stealth Reflector



Max. 625 cd 1,000 lm

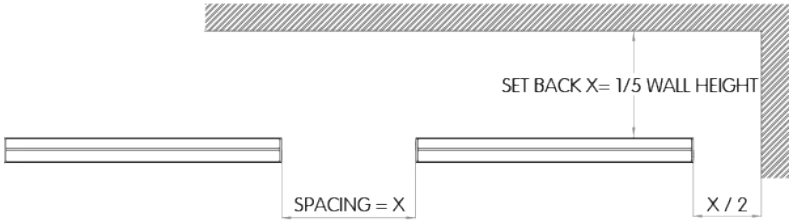

The Stealth Reflector privides even illumination of vertical surfaces with a flexible set back of 1/5 of the wall height and an offset to spacing ratio of 1:1. Stealth's optics are designed to wash large areas where exceptional uniformity and a quiet ceiling is required.

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Delivered Lumen Output:

Per Linear Foot

Output	Watts	CRI +90			
STATIC-WHITE		2700K	3000K	3500K	4000K
L	5W	606 lm	631 lm	650 lm	671 lm
M	10W	1235 lm	1287 lm	1324 lm	1362 lm
H	15W	1863 lm	1940 lm	1998 lm	2055 lm
V	20W	2511 lm	2614 lm	2693 lm	2772 lm

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Mounting Flexibility:

SURFACE MOUNTED

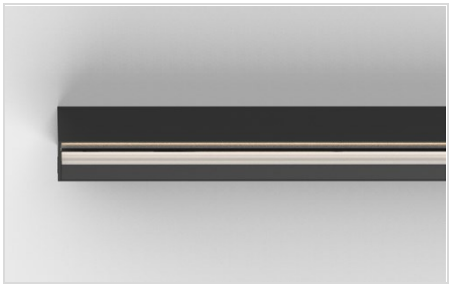



Actual (inch)
L= 12 1/8" | 23 15/16" | 35 3/4" | 47 9/l6" | 59 3/8" | Continuous runs
W= 2 3/16"
H= 3 3/8"

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us