BILLET OUTDOOR STEALTH WALLWASHER

Recessed with Trim

Key Features:

- Indirect wallwash optic (fully shielded source).
- Zero direct glare.
- Uniform vertical illumination from fixture line.
- Ideal for large architectural surfaces.
- 1985 lm/m to 2920 lm/m.



Technical Data:

Body Material	Extruded Aluminum	**Delivered Lumen Range**	1985 lm/m to 2920 lm/m
Safety	Chicago Plenum	**Dimensions**	Refer to Dimensions Table
Warranty	3 Years	**Driver**	Integral / Constant Current
Light Source	Mid Power LEDs	**Code Compliance**	CCEA / CSA / CE / ETL
Lifetime	L80/B10 @ 70,000 hours	**CRI**	90+
Power Range	16W/m to 66W/m	**CCT**	2700K / 3000K / 3500K / 4000K

Code:

Code Example: BOKR12WH2BWW9270

BOK												
Type	Mounting	Length	Body Finish	Power	Voltage	Control	Baffles Finish	Optics Type	CRI	CCT	Emergency
BOK	**R** Recessed with Trim	**24** 600 mm **36** 900 mm **48** 1200 mm **60** 1500 mm	**W** White **B** Black	Mono: **L** 16 W/m - 2070 lm/m **M** 33 W/m - 4222 lm/m **H** 49 W/m - 6365 lm/m **V** 66 W/m - 8576 lm/m	**2** 240-220V	**A** Non-Dim **B** 0-10 to 1% **D** DALI to 1% **E** ELV	**W** Flat White **B** Flat Black	**W** Washer	**9** 90+	**27** 2700K **30** 3000K **35** 3500K **40** 4000K	**N** No

Notes:

1. Static and dim to warm outputs are at 3000K.
2. Run length: it is an increment of 1ft for lengths above 5ft with the combinations of the standard lengths.
3. RGBW only available with DMX dimming.
4. Athena Node compatibility available upon request.

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Optical Flexibility:

STEALTH WALLWASHER

Stealth Reflector



Max. 625 cd 1,000 lm

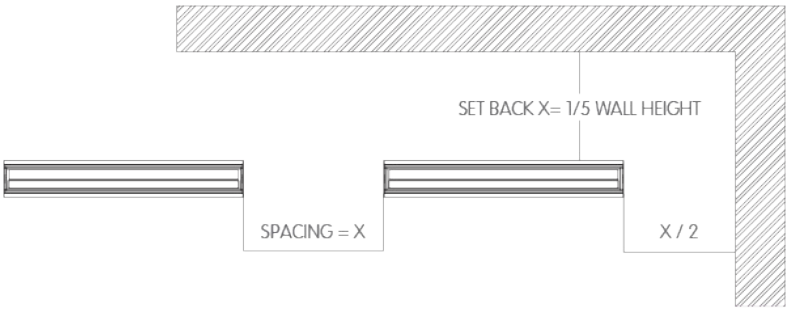

The Stealth Reflector provides even illumination of vertical surfaces with a flexible set back of 1/5 of the wall height and an offset to spacing ratio of 1:1. Stealth's optics are designed to wash large areas where exceptional uniformity and a quiet ceiling is required.

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Delivered Lumen Output:

Per Millimeter

Output	Watts	CRI +90			
STATIC-WHITE		2700K	3000K	3500K	4000K
L	**16W**	1988 lm	2070 lm	2133 lm	2201 lm
M	**33W**	4052 lm	4222 lm	4344 lm	4469 lm
H	**49W**	6112 lm	6365 lm	6555 lm	6742 lm
V	**66W**	8238 lm	8576 lm	8835 lm	9094 lm

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us

Mounting Flexibility:

RECESSED WITH TRIM

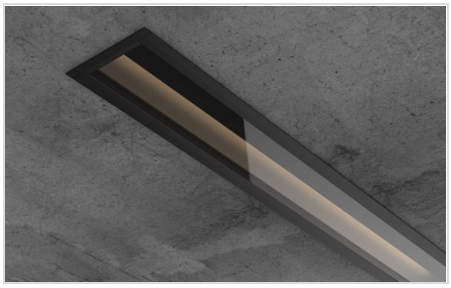



(L - 20 x W - 20)

Actual (mm)
L= 334 | 634 | 934 | 1234 | 1534 | Continuous runs
W= 80
H= 91

Bold Lighting
1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
info@boldlighting.us t:+1-678-903-4061 www.boldlighting.us