


CHAMELEON SURFACE ROUND WALLWASH

Surface Mounted



Key Features:

- Up to 1050lm delivered output
- High uniformity light distribution $E_{min.}/E_{max.} = 1/3$
- 5 years limited warranty
- Chicago plenum rated



Technical Data:

Body Material	Die-cast	Delivered Lumen Range	520 lm to 1050 lm
Safety	Chicago Plenum	Output Type	Constant Current
Warranty	5 Years	Driver	Integral
Light Source	COB	Code Compliance	CCEA / CCC / CSA / CE / ETL / JA8
Lifetime	L80/B10 @ 70,000 hours	CRI	90+
Power Range	10W to 22W	CCT	2700K / 3000K / 3500K / 4000K / Tunable White / Dim to Warm / RGBW

Housing Code :

Code Example: SCHSW2109

SCHS	Power	Voltage	Control	Housing	Emergency
Type	Power	Voltage	Control	Housing	Emergency
SCHS	Mono:	2	0	O	N
L	10 W - 650 lm	240-220V	Non-Dim	Octogonal J-Box	No
U	Universal 120 to 277V	0-10 to 1%	1	No J-Box	9 90 mins
M	12 W - 790 lm	0-10 Fade-off	2	No J-Box	
H	18 W - 1180 lm	DALI	D		
V	22 W - 1440 lm	Phase ELV & Triac	P		
Dim to Warm:		Lutron	L		
L	10 W - 530 lm	DMX	X		
M	18 W - 1070 lm				
Tunable White:					
L	10 W - 580 lm				
M	18 W - 850 lm				
RGBW:					
L	4 W - 420 lm				

Module Code :

Code Example: SCMSWLWWS9270

Fill in the same power code value for the housing and module.

SCMSW	Power	Body Finish	Baffles Finish	UL Rating	Optics Type	CRI	CCT	Accessory
Type	Power	Body Finish	Baffles Finish	UL Rating	Optics Type	CRI	CCT	Accessory
SCMSW	Mono:	W	W	D	W	9	27	O
L	10 W - 650 lm	White	Flat White	Dry	Washer	90+	2700K	None
B	12 W - 790 lm	Black	Flat Black	Wet		Thrive	3000K	Clear Lens
M	12 W - 790 lm	Grey	Black Nickel				3500K	Diffuse Lens
H	18 W - 1180 lm	Custom	Specular Chrome				4000K	Elliptical Lens
V	22 W - 1440 lm		Diffuse Chrome				4000K	
Dim to Warm:			Bright Gold				1800K	
L	10 W - 530 lm		Diffuse Gold				2700K - 6500K	
M	18 W - 1070 lm		Custom				3000K - 1800K	
Tunable White:							1800K	
L	10 W - 580 lm						2700K - 6500K	
M	18 W - 850 lm						3000K - 1800K	
RGBW:							2700K - 6500K	
L	4 W - 420 lm						1800K	



Notes:


1. Denotes output at 3000K, unless otherwise noted.
2. Denotes output specific to Dim-to-Warm at 3000K.
3. Denotes output specific to Tunable White.
4. Denotes output specific to RGBW.
5. Not applicable for ELV dimming.
6. Hi-lume, Vive, and Athena compatible.
7. Only available with DMX dimming.
8. Not applicable for integral driver.



Optical Flexibility:


CHAMELEON SURFACE ROUND WALLWASH

Wallwash Distribution



Wallwasher Optimal Spacing

Plan View

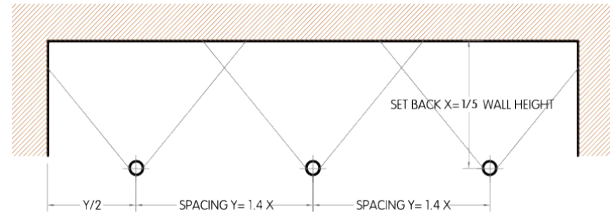

BEAM DISTRIBUTION





Wallwash

Delivered Lumen Output:

Output		Watts	CRI +90			
STATIC-WHITE			2700K	3000K	4000K	
L		10W	610 lm	650 lm	850 lm	
M		12W	740 lm	790 lm	1020 lm	
H		18W	1110 lm	1180 lm	1530 lm	
V		22W	1350 lm	1440 lm	1870 lm	
DIM-TO-WARM			3000K			
3000K-3000K						
L		10W	530 lm			
M		18W	1070 lm			
TUNABLE WHITE			2700K			6500K
2700K-6500K						
L		10W	580 lm			670 lm
M		18W	850 lm			990 lm
RGBW			R	G	B	W
Total		4W	60 lm	420 lm	60 lm	320 lm

Mounting Flexibility:

SURFACE MOUNTED



Housing:

Octagonal J-Box

