


CHAMELEON R3 STREAMLINE WALLWASHER

Millwork



Key Features:

- Up to 780lm delivered output
- High uniformity light distribution Emin./ Emax. = 1/3
- 5 years limited warranty
- Chicago plenum rated



Technical Data:

Body Material	Die-cast	Delivered Lumen Range	370 lm to 780lm
Safety	Chicago Plenum	Output Type	Constant Current
Warranty	5 Years	Driver	Integral
Light Source	COB	Code Compliance	CCEA / CCC / CSA / CE / ETL / JA8
Lifetime	L80/B10 @ 70,000 hours	CCT	2700K / 3000K / 3500K / 4000K / Tunable White / Dim to Warm
Power Range	8W to 12W		

Housing Code :

Code Example: CEHR3L20R9

CEHR3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Type	Power	Voltage	Control	Housing	Emergency
CEHR3	Mono:	2	0	R	N
L	8 W - 470 Im	240-220V	Non-Dim	Remodel	No
U	120 to 277V	0-10 to 1%	Non-IC	90 mins	
M	10 W - 530 Im	0-10 Fade-off	IC		
H	12 W - 625 Im	DALI	Airtight		
Dim to Warm:		Phase ELV & Triac	No Housing		
W	8 W - 370 Im	Lutron			
D	12 W - 520 Im	DMX			
Tunable White:					
U	8 W - 300 Im				
A	12 W - 450 Im				
RGBW:					
C	2 W - 145 Im				

Module Code :

Code Example: CEMR3WLWDDW9270

CEMR3W	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Type	Power	Body Finish	Baffles Finish	UL Rating	Optics Type	CRI	CCT	Accessory	
CEMR3W	Mono:	W	W	D	W	9	27	O	
L	8 W - 470 Im	White	Flat White	Dry	Washer	90+	2700K	None	
B	12 W - 625 Im	Black	Flat Black	Wet	Thrive		3000K		
M	10 W - 530 Im	Grey	Black Nickel				3500K		
H	12 W - 625 Im	Custom	Diffuse Chrome				4000K		
Dim to Warm:			Custom				3000K - 1800K		
W	8 W - 370 Im						4000K		
D	12 W - 520 Im						WD		
Tunable White:							3000K - 1800K		
U	8 W - 300 Im						4000K		
A	12 W - 450 Im						WD		
RGBW:							3000K - 1800K		
C	2 W - 145 Im						4000K		



Fill in the same power code value for the housing and module.

- Notes:
1. Denotes output at 3000K, unless otherwise noted.
 2. Denotes output specific to Dim-to-Warm at 3000K.
 3. Denotes output specific to Tunable White.
 4. Denotes output specific to RGBW.
 5. Not applicable for ELV dimming.
 6. Hi-lume, Vive, and Athena compatible.
 7. Only available with DMX dimming.
 8. Not applicable for integral driver.



Optical Flexibility:

CHAMELEON STREAMLINE R3 WALLWASHER

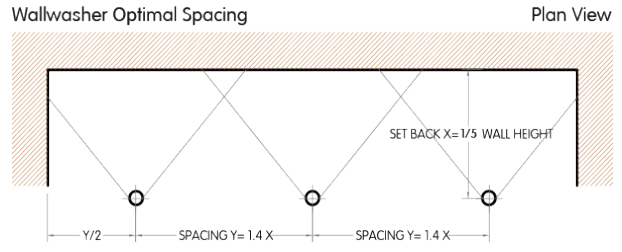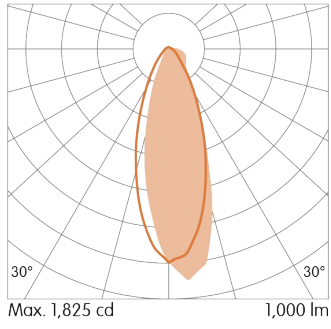

BEAM DISTRIBUTION




Wallwash


Delivered Lumen Output:


Output	Watts	CRI +90			
STATIC-WHITE		2700K	3000K	4000K	
L	8W	370 lm	470 lm	490 lm	
M	10W	490 lm	530 lm	680 lm	
H	12W	585 lm	625 lm	780 lm	
DIM-TO-WARM 3000K-3000K		3000K			
W	8W	370 lm			
D	12W	520 lm			
TUNABLE WHITE 2700K-6500K		2700K	6500K		
U	8W	300 lm	340 lm		
A	12W	450 lm	510 lm		
RGBW		R	G	B	W
Total	2W	20 lm	145 lm	25 lm	100 lm

Mounting Flexibility:

MILLWORK

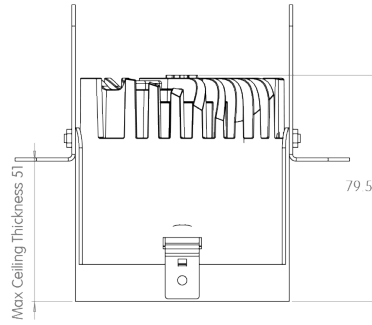


 $\varnothing 76.5 \text{ mm}$

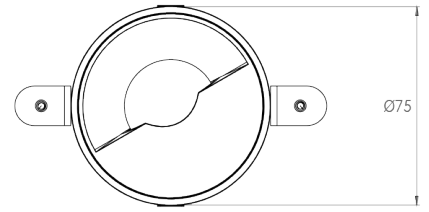


Housing:

REMODEL HOUSING

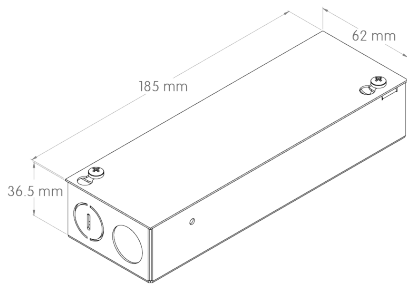


- Ceilings Without Insulation.
- You Want Higher Wattage Fixtures.
- When There's At Least 76.5mm Clearance Around Fixture.

NON-IC HOUSING

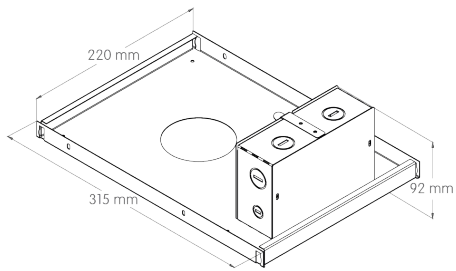

- Ceilings Without Insulation.
- You Want Higher Wattage Fixtures.
- When There's At Least 76.5mm Clearance Around Fixture.

IC HOUSING & AIRTIGHT

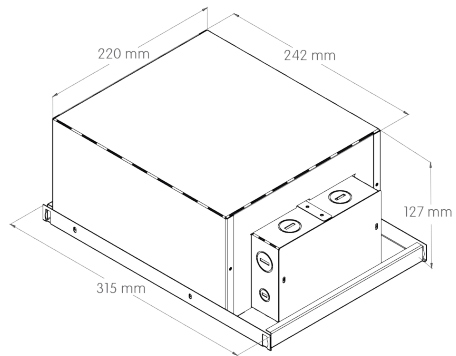

- If There Is Insulation in the Ceiling.
- In Residential Ceilings or Attics.
- In Energy-Efficient or Sealed Homes.

