


CHAMELEON R4 WALLWASHER

Trimless



Key Features:

- Up to 1050lm delivered output
- High uniformity light distribution Emin./ Emax.= 1/3
- 5 years limited warranty
- Chicago plenum rated



Technical Data:

Body Material	Die-cast	Delivered Lumen Range	520 lm to 1050 lm
Safety	Chicago Plenum	Output Type	Constant Current
Warranty	5 Years	Driver	Integral
Light Source	COB	Code Compliance	CCEA / CCC / CSA / CE / ETL / JA8
Lifetime	L80/B10 @ 70,000 hours	CCT	2700K / 3000K / 3500K / 4000K / Tunable White / Dim to Warm / RGBW
Power Range	10W to 22W		

Housing Code :

Code Example: C4HR0L20R9

C4HR0	□	□	□	□	□
Type	Power	Voltage	Control	Housing	Emergency
C4HR0	Mono:	2	0	R	N
	L	240-220V	Non-Dim	Remodel	No
	10 W - 550 lm	U	1	N	9
		Universal 120 to 277V	0-10 to 1%	Non-IC	90 mins
	M		2	I	
	12 W - 755 lm		0-10 Fade-off	IC	
	H		D	A	
	18 W - 1020 lm		DALI	Airtight	
	Dim to Warm:		P	0	No Housing
	W		Phase ELV & Triac		
	10 W - 355 lm		L		
	D		Lutron		
	18 W - 640 lm		X		
	Tunable White:		DMX		
	U				
	10 W - 600 lm				
	A				
	18 W - 800 lm				
	RGBW:				
	C				
	4 W - 270 lm				

Module Code :

Code Example: C4MR0WLBBWW9270

▼ Fill in the same power code value for the housing and module.



C4MR0W	□	□	□	□	□	□	□	□	□
Type	Power	Body Finish	Baffles Finish	UL Rating	Optics Type	CRI	CCT	Accessory	
C4MR0W	Mono:	W	W	W	W	9	27	O	
	L	White	Flat White	Wet	Washer	90+	2700K	None	
	10 W - 550 lm	B	B			H	30		
		Black	Flat Black			Thrive	3000K		
	M	G	N				35		
	12 W - 755 lm	Grey	Black Nickel				3500K		
	H	X	C				40		
	18 W - 1020 lm	Custom	Specular Chrome				4000K		
	Dim to Warm:		D				WD		
	W		Diffuse Chrome				3000K - 1800K		
	10 W - 355 lm		G				TW		
	D		Bright Gold				2700K - 6500K		
	18 W - 640 lm		E				CC		
	Tunable White:		Diffuse Gold				RGBW		
	U								
	10 W - 600 lm								
	A								
	18 W - 800 lm								
	RGBW:								
	C								
	4 W - 270 lm								

- Notes:
1. Denotes output at 3000K, unless otherwise noted.
 2. Denotes output specific to Dim-to-Warm at 3000K.
 3. Denotes output specific to Tunable White.
 4. Denotes output specific to RGBW.
 5. Not applicable for ELV dimming.
 6. Hi-lume, Vive, and Athena compatible.
 7. Only available with DMX dimming.
 8. Not applicable for integral driver.



Optical Flexibility:

CHAMELEON R4 WALLWASHER

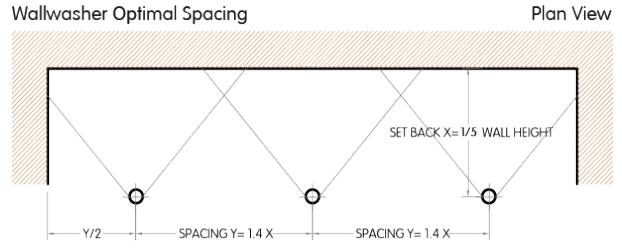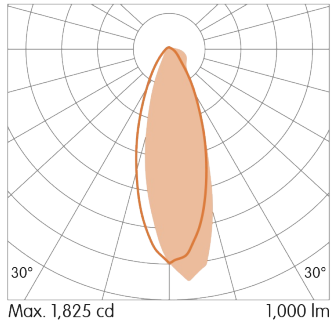

BEAM DISTRIBUTION




Wallwash


Delivered Lumen Output:


Output	Watts	CRI +90			
STATIC-WHITE		2700K	3000K	4000K	
L	10W	520 lm	550 lm	565 lm	
M	12W	725 lm	755 lm	780 lm	
H	18W	975 lm	1020 lm	1050 lm	
DIM-TO-WARM 3000K-3000K		3000K			
W	10W	355 lm			
D	18W	640 lm			
TUNABLE WHITE 2700K-6500K		2700K	6500K		
U	10W	600 lm	680 lm		
A	18W	800 lm	980 lm		
RGBW		R	G	B	W
Total	4W	40 lm	270 lm	45 lm	180 lm

Mounting Flexibility:

TRIMLESS

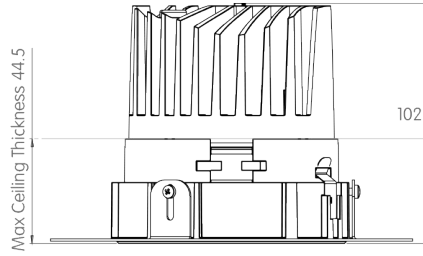


 $\varnothing 111 \text{ mm}$

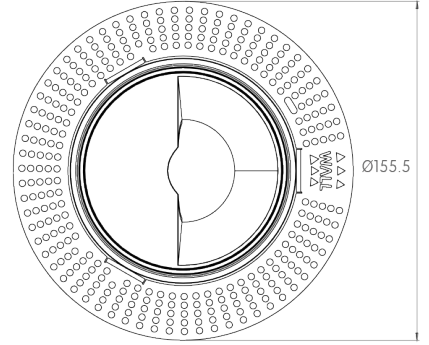


Housing:

REMODEL HOUSING

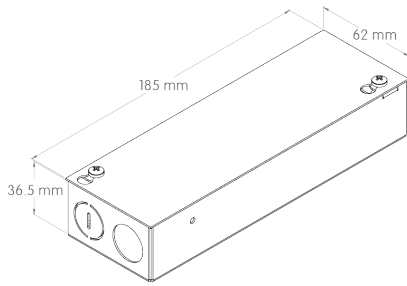


- Ceilings Without Insulation.
- You Want Higher Wattage Fixtures.
- When There's At Least 76.5mm Clearance Around Fixture.

NON-IC HOUSING

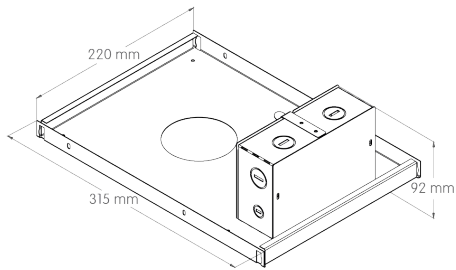

- Ceilings Without Insulation.
- You Want Higher Wattage Fixtures.
- When There's At Least 76.5mm Clearance Around Fixture.

IC HOUSING & AIRTIGHT

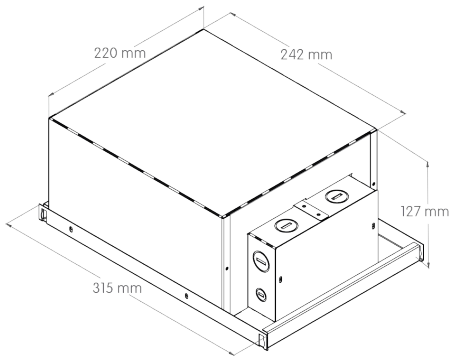

- If There Is Insulation in the Ceiling.
- In Residential Ceilings or Attics.
- In Energy-Efficient or Sealed Homes.

